


PolyVision PJ905

POLYVISION PJ905

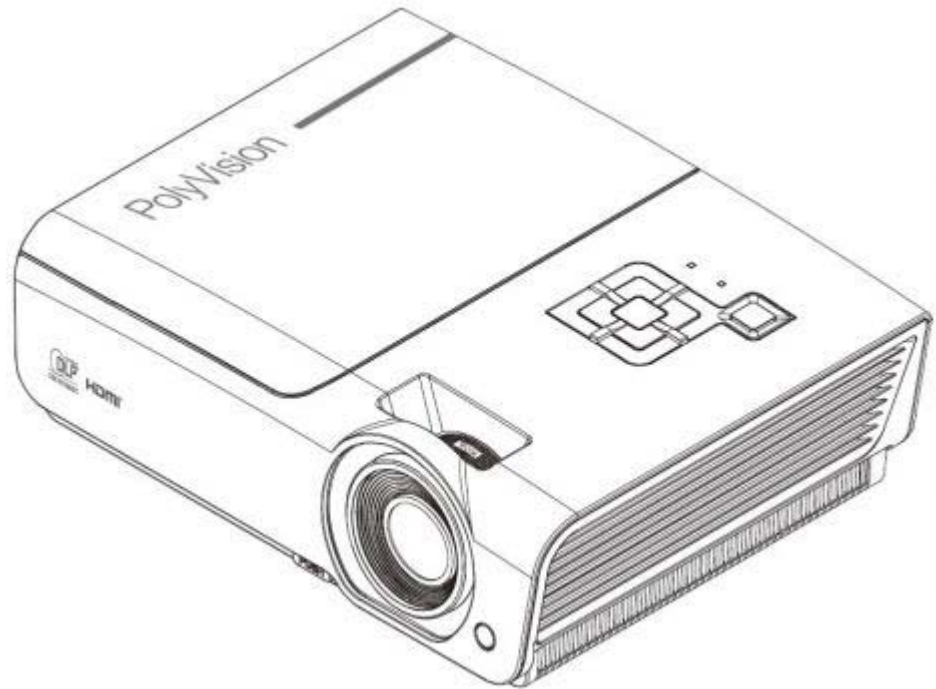

A brief introduction to the PJ905: The PolyVision short-throw BrilliantColor DLP projector offers 2600 Ansi lumens a contrast of 2400:1 and a WXGA 1280 x 800 resolution. With a projection ratio of just 0.53:1, this projector never gets in the way. For a 2m wide image, the projector only needs to be 106 cm away from the screen. The model is also Full HD 1080P compatible. The model was built by PolyVision in 2010 and is no longer current, but is still very popular in our projector database.

 1 x 0,65" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Projector	2600	Screen	1040 Lux (bei 200 cm Screen)
	2400:1 full on/off		2400:1 full on/off
	1,0833 min. Lumen		0,434 min. Lumen

Resolution: WXGA 1280 x 800
1.024.000 Pixel
UXGA 1600 x 1200 compressed

Video Modes: PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition: DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application: Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source: 230W Lamp
Articel Nr.: 5811100784-S

Light Life: 3000 h. 4000 h. in Eco Mode

Operating Costs: -

Focus: Manual

Zoom: No Zoom

Objective: F=2,87 f=7,36mm

Throw Ratio: 0,53:1

Audio: 3W Mono

Connections: HDMI 1.3 in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
RS232C
RJ45 in

Ceiling Mounting: Yes
Power: 290 / 240W in Eco Mode



Size WxHxD	355 x 102 x 256 mm (14"x4"x10,1") 9,27 L/dm³	
Operating Noise	34 / 29 dB in Eco Mode	
Weight	3,50 kg / 6,61 lbs.	
Keystone	-	
Illumination	-	
Frequenz	H-sync: 15,30-90 kHz V-sync: 43,85 Hz	
Foot-Lamberts	97 fL / max. 518 cm screen width 332 cd/m²	
Features	■ Full HD 1080P compatible	
	■ Freeze	
	■ Eco Mode	
	■ Kensington Slot	
	■ sRGB	
	■ Gamma correction	
	■ Password protection	
	■ BrilliantColor™	
	■ Remote control with laser pointer	
	■ Control via web browser	
	■ Lan network compatible.	
	■ Overscan adjustable	
	■ Short-throw projector	
	■	
	Bulb only	NLMP19694
Optional	Lamp ruby	Ruby-LMP19694
	Lamp original	5811100784-S
	Compatible lamp	LMP-K19237
	Remote control original	5041841300
	Ceiling Mount 100-120	Halterung100
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n9005514	
Data	2010 Discontinued (EOL) // Last update of the data: 2024-06-10	
	Created: 2024-06-05 09:04:37	

More Details



HCinema

<https://www.projector-database.com/pro/PolyVisionPJ905-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.