Acer P1655

ACER P1655

Brief Introduction Beta 2.5	A brief introduction to the P1655: The Acer standard portable 3D DLP projector offers 4000 Ansi lumens, a contrast of 10000:1 and a resolution. The manufacturer Acer specifies a lamp life of 10000 hours, which converts to over 13.7 years at 2 hours per day. Built-in horizontal and vertical keystone correction provides freedom when positioning the projector. Thanks to the brightness of 4000 Ansi lumens, an image width of 643 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 429 cm). The HDMI MHL (Mobile High-Definition Link) port allows 1080p / 60 Hz image mirroring (screen mirroring) to be transmitted from the smartphone while it is being charged at the same time via the connection. It is also Full HD 1080P and 3D compatible. The model was built by Acer in 2019 and is no longer current.
Display Type	1 x 0,48" DLP CHIP WUXGA 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 4000 / 3200 im Eco Mode; Screen: 1778 Lux (200 cm Screen width)
Contrast	Projector: 10000:1 full on/off; Screen: 10000:1 full on/off
Black Level	Projector: 0,4000 min. Lumen; Screen: 0,178 min. Lumen
Offset	
Resolution	WUXGA 1920 x 12002.304.000 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	240W UHP Lamp Article Nr.: UC.JRE11.001
Light Life	4000 h. 10000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,94-2,06 f=15,57-18,67 mm
Throw Ratio	1,47-1,76:1
Audio	1 x 10W

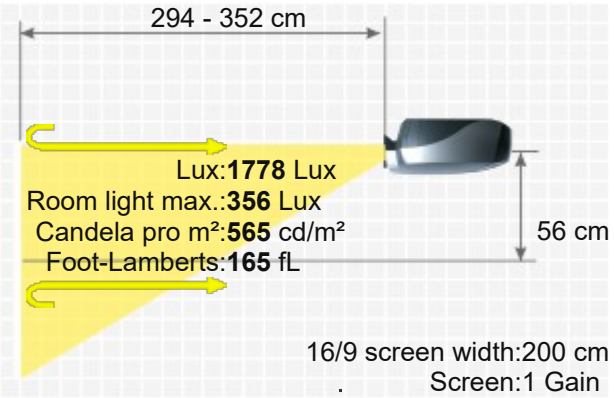

Connections	2 x HDMI 1.4 und MHL in 2 x D-sub 15pin in 1 x out Cinch Video in Mini Jack Audio in und out USB Typ A in RS232C Din 9 pin in

Ceiling Mounting	Yes, is possible.
Power	300W
Size WxHxD	322 x 91 x 225 mm (12,7"x3,6"x8,9") 6,59 L/dm³
Operating Noise	32 / 26 dB in Eco Mode

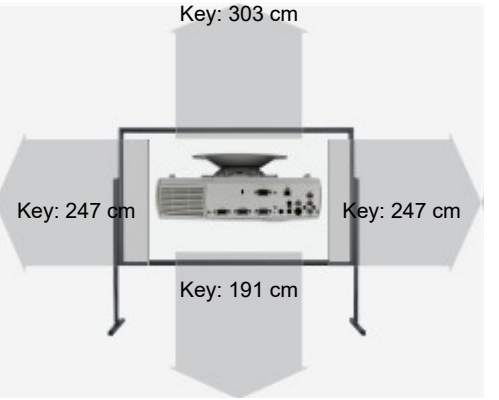

Weight	2,90 kg / 6,39 lbs.
Keystone	Vert.: +/-40° automatisch Hori.: +/-40°
Illumination	85%
Frequenz	H-sync: 15-100 kHz V-sync: 24-120 Hz
Foot-Lamberts	165 fL / max. 643 cm screen width 565 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot ■ Password protection ■ Optional Wi-Fi network compatible.
Screen Mirroring	über HDMI MHL

Optional accessories

	Nackte Philips Lampe	NLMP24991	77,65 €
	Lampe Original	UC.JRE11.001	EOL €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status: 2019 Discontinued (EOL) // Last update of the data: 2026-05-05
Created: 2019-11-21 14:04:44

Data

More Details

HCinema
https://www.projector-database.com/pro/acerp1655-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.