

Benq MS521P

BENQ MS521P



Brief Introduction

Beta 2.5

The Benq model MS521P is a DLP projector with SVGA 800 x 600 resolution and a contrast of 13000:1. The manufacturer specifies a lamp life of 4500 hours, which is over 6.2 years with a daily viewing time of 2 hours. A picture width of up to 477 cm is possible. However, the picture should be smaller in room light. We recommend max. 318 cm. The model is also Full HD 1080P and 3D compatible. The model was built by Benq in 2013 and is no longer current, but is still very popular in our projector database.



1 x DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

3000
13000:1 full on/off
0,2308 min. Lumen

1000 Lux (bei 200 cm Screen)
13000:1 full on/off
0,077 min. Lumen

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W Lamp

Articel Nr.: 5J.J9R05.001

Light Life

4500 h. 6500 h. in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,56-2,8 f=21-23,10 mm

Throw Ratio


1,86-2,04:1

Audio

1 x 2W

Connections

HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ B in

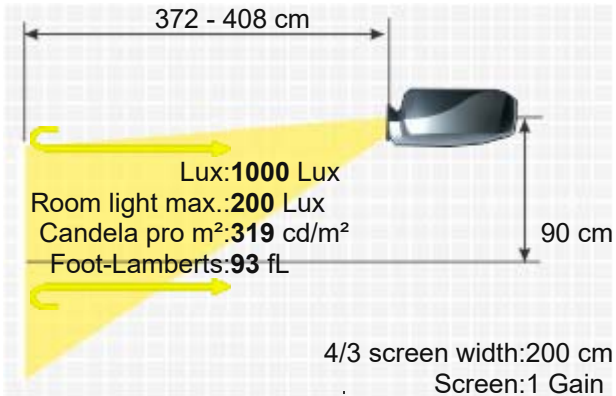

RS232C Din 9 pin in



Ceiling Mounting	Yes
Power	270 / 220W in Eco Mode
Size WxHxD	283 x 88,7 x 222 mm (11,1"x3,5"x8,7") 5,53 L/dm³
Operating Noise	-

Weight	1,90 kg / 4,19 lbs.
Keystone	Vert.: +/-40°
Illumination	-

Frequenz	H-sync: 15-102 kHz V-sync: 23-120 Hz
----------	---

Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
---------------	---

Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot ■ sRGB
----------	--

Optional	Remote control original	5J.J9V06.001 / RCX022
----------	-------------------------	-----------------------

Optional	Lamp original	5J.J9R05.001
----------	---------------	--------------

Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro22339 2013 Discontinued (EOL) // Last update of the data: 2023-08-04 Created: 2013-09-24 15:41:57
--------	---



Data	     
	 

More Details



HCinema

<https://www.projector-database.com/pro/benqms521p-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.