

Benq MX552P

BENQ MX552P



Brief Introduction

Beta 2.5

The standard portable MX552P 3D DLP projector from Benq has 3000 Ansi lumens, a contrast of 13000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 4500 hours, which is over 6.2 years if enjoyed for two hours a day. Due to the brightness of 3000 Ansi lumens, a picture width of 477 cm is possible. In room light, the picture should be max. 318 cm wide. The model is also Full HD 1080P and 3D compatible. The model was built by Benq in 2013 and is no longer current.

Display Type

1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

13000:1 full on/off

13000:1 full on/off

Black Level

0,2308 min. Lumen

0,077 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W Lamp

Articel Nr.: 5J.J9R05.001

Light Life

4500 h. 6500 h. in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,56-2,8 f=21-23,10 mm

Throw Ratio

1,86-2,04:1

Audio

1 x 2W

Connections

HDMI in

2 x D-sub 15pin in 1 x out


Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack Audio in und out

USB Typ B in

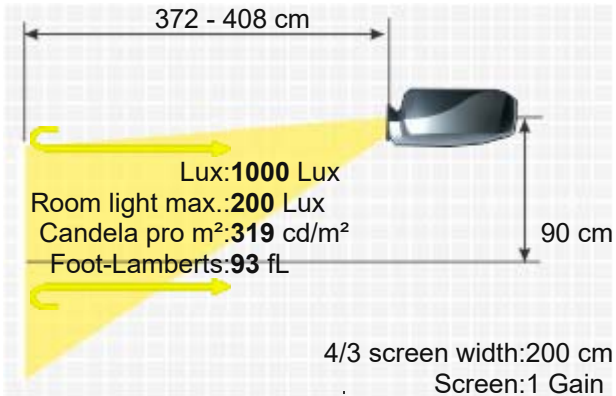

RS232C Din 9 pin in



Ceiling Mounting	Yes
Power	270 / 220W in Eco Mode
Size WxHxD	283 x 88,7 x 222 mm (11,1"x3,5"x8,7") 5,53 L/dm³
Operating Noise	33 / 28 dB in Eco Mode

Weight	1,90 kg / 4,19 lbs.
Keystone	Vert.: +/-40°
Illumination	-
Frequenz	H-sync: 15-102 kHz V-sync: 23-120 Hz
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot ■ sRGB

Optional	Remote control original	5J.J9V06.001 / RCX022
	Lamp original	5J.J9R05.001

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro22340>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-09-24 15:42:49



More Details



<https://www.projector-database.com/pro/benqmx522p-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

