

Benq MX620ST

BENQ MX620ST



With the MX620ST, manufacturer Benq offers a standard portable DLP projector with XGA 1024 x 768 resolution and a contrast of 13000:1. The lamp life is up to 4500 hours, which is over 6.2 years with a daily viewing time of 2 hours. The projector can illuminate a picture width of up to 477 cm well thanks to the 3000 Ansi lumens. In room light, however, the image width should ideally be less than 318 cm. Playing 1080P is also no problem for the projector. The model was built by Benq in 2013 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

13000:1 full on/off

13000:1 full on/off

Black Level

0,2308 min. Lumen

0,077 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W Lamp

Articel Nr.: 5J.J9V05.001

Light Life

4500 h. 6500 h. in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,6-2,78 f=10,2-12,24 mm

Throw Ratio

0,9-1,08:1

Audio

1 x 10W

Connections

HDMI in

2 x D-sub 15pin in 1 x out

Cinch Video in


Cinch Stereo in

S-Video in

Mini Jack Audio in und out

USB Typ A in

RS232C Din 9 pin in

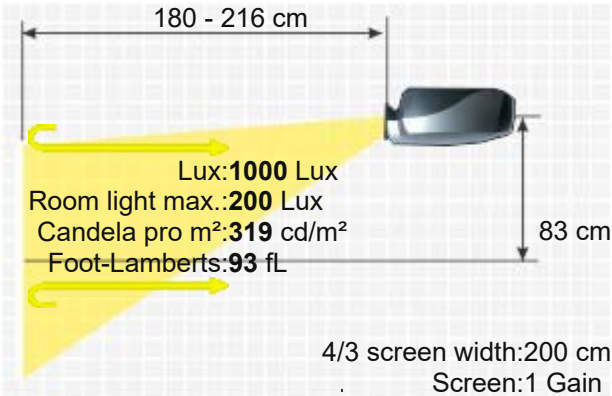



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
270 / 220W in Eco Mode
287,30 x 114,40 x 232,60 mm (11,3"x4,5"x9,2") 7,59 L/dm³
33 / 28 dB in Eco Mode

Weight
Keystone
Illumination

2,60 kg / 5,73 lbs.
Vert.: +/-40°
-

Frequenz

H-sync: 15-102 kHz
V-sync: 23-120 Hz

Foot-Lamberts

93 fL / max. 477 cm screen width
319 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- sRGB
- Short-throw projector

Optional

Remote control original 5J.J9V06.001 / RCX022
Lamp original 5J.J9V05.001

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro22277>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-09-24 16:06:32



Data



More Details



HCinema

<https://www.projector-database.com/pro/benqmx620st-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.