

Benq MX852UST



BENQ MX852UST



Brief Introduction

Beta 2.5

A brief introduction to the Benq MX852UST. The DLP projector has an XGA 1024 x 768 resolution and a contrast of 10000:1. The manufacturer Benq specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. Thanks to the short-throw projection ratio of just 0.43:1, the projector does not stand still in the room. For a 2m wide image, the projector only needs to be 86 cm away from the screen. The model is also Full HD 1080P and 3D compatible. The model was built by Benq in 2014 and is no longer current, but is still a popular projector in our database.



1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

3000
10000:1 full on/off
0,3000 min. Lumen
1000 Lux (bei 200 cm Screen)
10000:1 full on/off
0,1 min. Lumen

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray (komprimiert) | 4K-UHD-Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

230W Lamp

Articel Nr.: 5J.J8M05.01

Light Life

4000 h. 7000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=2,5 f=5,1mm

Throw Ratio

0,43:1

Audio

2 x 10W

Connections

HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ B in
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting

Yes

Power


-

Size WxHxD

-

Operating Noise

33 / 29 dB in Eco Mode

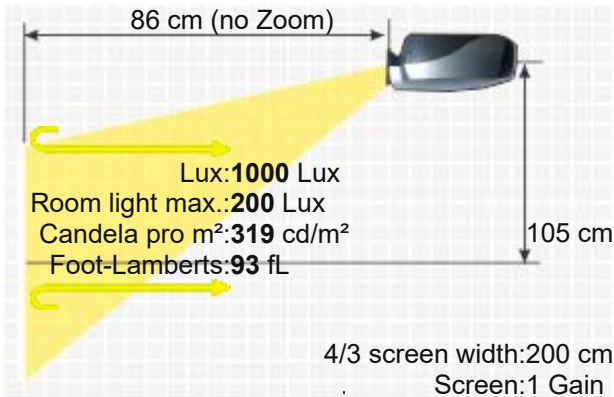

Weight
Keystone
Illumination

-
Vert.: +/-40°
-

Frequenz

-

Foot-Lamberts

93 fL / max. 477 cm screen width
319 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- sRGB
- BrilliantColor™
- Lan network compatible.
- Short-throw projector

Optional

Remote control original 5J.JAD06.001 / 5J.JAC06.001 / RCE012 / RCE011
Lamp original 5J.J8M05.011

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=frohc1225>

2014 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

Created: 2014-08-12 13:52:45



More Details



HCinema

<https://www.projector-database.com/pro/benqmx852ust-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.