

Canon XEED 4K601Z

CANON XEED 4K601Z



The Canon XEED 4K601Z stationary Laser LCOS projector has 6000 Ansi lumens, a contrast of 10000:1 and a UHD (4K+2K+) 4096 x 2400 resolution. The service life is 20000 hours due to the laser, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. 6000 Ansi lumens ensure that a picture width of 675 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 450 cm. The model is also Full HD 1080P and 4K compatible. The model was built by Canon in 2018 and is no longer current.

3 x 0,67" LCOS Panel
UHD 4/3 Liquid Crystal on Silicon (LCOS)

Projector	6000	2000 Lux (bei 200 cm Screen)
Contrast	10000:1 full on/off	10000:1 full on/off
Black Level	0,6000 min. Lumen	0,2 min. Lumen

Lens shift
Vert.: +/-60% Hori.: +/-10%

Resolution
UHD (4K+2K+) 4096 x 2400

9.830.400 Pixel
Video Modes
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Application
Very large screen width and rooms with plenty of light and shaded daylight.

Light Source
Laser

Light Life
20000 h. 40000 h. in Eco Mode

Operating Costs
0,00 € Laser

Focus
Powered

Zoom
Powered 1,77


Objective
F=2,4-2,75 f=22,7-39,8 mm

Throw Ratio
1,3-2,3:1

Audio
5W Mono

Connections
2 x HDMI HDCP 2.2 in
DVI-D in
Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting
Yes
Power
665 / 470W in Eco Mode

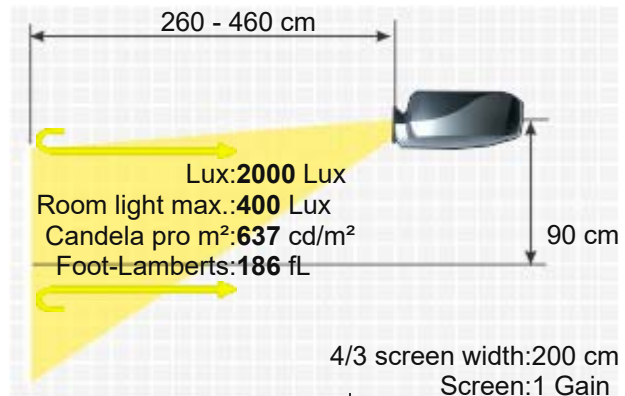

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio


Audio

Connections

Ceiling Mounting

Power

Size WxHxD	559 x 201 x 624 mm (22"x7,9"x24,6") 70,11 L/dm³
Operating Noise	37 / 29 dB in Eco Mode
Weight	26,00 kg / 57,32 lbs.
Keystone	Vert.: +/-20°
Illumination	Hori.: +/-20° 80%
Frequenz	-
Foot-Lamberts	186 fL / max. 675 cm screen width 637 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Eco Mode ■ PJLink™ ■ Wi-Fi network compatible. ■ Lan network compatible. ■ Crestron®-Software compatible. ■ WLAN transmission standard IEEE 802.11b / g / n
Status	2018 Discontinued (EOL) // Last update of the data: 2023-08-04 Created: 2018-01-09 16:18:59

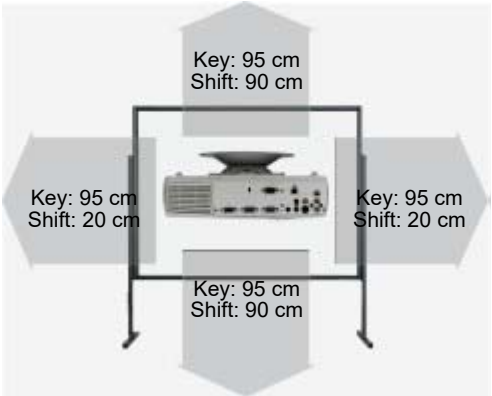

More Details



HCinema

<https://www.projector-database.com/pro/canonxeed4k601z-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.