

Casio XJ S30

CASIO XJ S30



A brief introduction to the Casio XJ S30. The DLP projector has an XGA 1024 x 768 resolution and a contrast of 1800:1, including an integrated media player for direct playback of files. Thanks to the horizontal and vertical keystone correction, the projector can be positioned very freely. A picture width of up to 389 cm is possible. However, the image should be smaller in room light. We recommend max. 259 cm. The model was built by Casio in 2006 and is no longer current.

Brief Introduction

Display Type

1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2000

667 Lux (bei 200 cm Screen)

Contrast

1800:1

1800:1

Black Level

1,1111 min. Lumen

0,371 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: JPEG BMP AVI MPEG4

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W Lamp

Light Life

Articel Nr.: YL-33 / 10248034

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 2,0

Objective

-

Throw Ratio

1,4-2,8:1

Audio

-

Connections

1 x D-sub 15 pin in

Cinch Video in

Ceiling Mounting

Yes

Power


-

Size WxHxD

270 x 43 x 199 mm (10,6"x1,7"x7,8") 2,31 L/dm³

Operating Noise

-

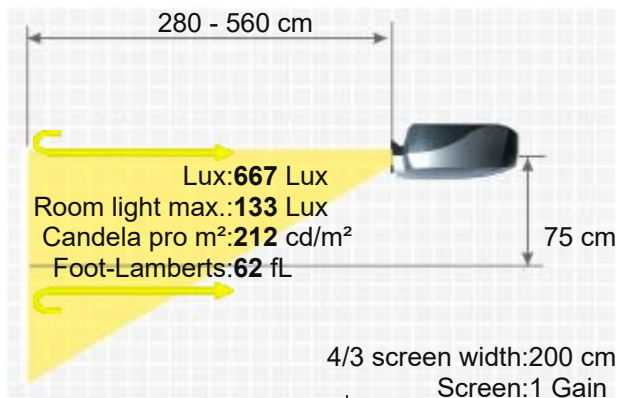

Key: 237 cm

Weight

1,80 kg / 3,97 lbs.

Keystone

Vert.: +/-30° automatisch

Hori.: +/-30°

Illumination

-

Frequenz

-

Foot-Lamberts

62 fL / max. 389 cm screen width

212 cd/m²

- Features

- Integrated Mediaplayer
 - Freeze
 - Blank (Black screen button)
 - Eco Mode
 - Automatic and manual vertical keystone correction
 - Kensington Slot
 - Password protection
 - Optional Wi-Fi network compatible.
 - Optional LAN network compatible.
 - 4x digital zoom.

	Bulb only	NLMP15343
	Lamp original	1189-34
Optional	Universal Remote original	Fernb-uni-V3
	Remote control original	10253775
	Ceiling Mount 100-120	Halterung100

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15344>
 2006 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/casioxjs30-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

