

CineVersum BlackWing One MK2015



BLACK WING 3D



The high-end home cinema BlackWing One MK2015 3D DILA projector from CineVersum has 1300 Ansi lumens, a contrast of 60000:1 and a UHD (4K2K) 3840 x 2160 resolution. The lamp has a service life of up to 4000 hours, which is over 5.5 years if enjoyed for two hours a day. Includes a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 1300 Ansi lumens, a picture width of 366 cm is possible. In room light, the picture should be max. 244 cm wide. Furthermore, it is Full HD 1080P and 4K as well as 3D compatible, meaning that all currently available Blu-ray formats can be recognized by the projector. The operating noise of just 19 decibels makes the projection quiet. The model was built by CineVersum in 2015 and is no longer current.



3 x 0,7" DILA Chip

HDTV 16/9 Direct-Drive Image Light Amplification (D-ILA)

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

1300

578 Lux (bei 200 cm Screen)

Contrast

60000:1 full on/off

60000:1 full on/off

Black Level

0,0217 min. Lumen

0,01 min. Lumen

Lens shift

Vert.: +/-80% Hori.: +/-34%

Resolution

UHD (4K2K) 3840 x 2160

8.294.400 Pixel / FHD E-Shift

HD4K 4096 x 2160 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (30p, 60p)

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

NSH 230W Lamp

Article Nr.: R8760004

Light Life

4000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 2

Objective

F=3,2-4,0 f=21,4-42,80 mm

Throw Ratio

1,4-2,8:1

Audio

Nein

Connections

2 x HDMI 1.4a

RS232C

12V Trigger out

RJ45 in

Ceiling Mounting

Yes, is possible.

Power


360W

Size WxHxD

540 x 220 x 560 mm (21,3"x8,7"x22") 66,53 L/dm³


Operating Noise

19dB

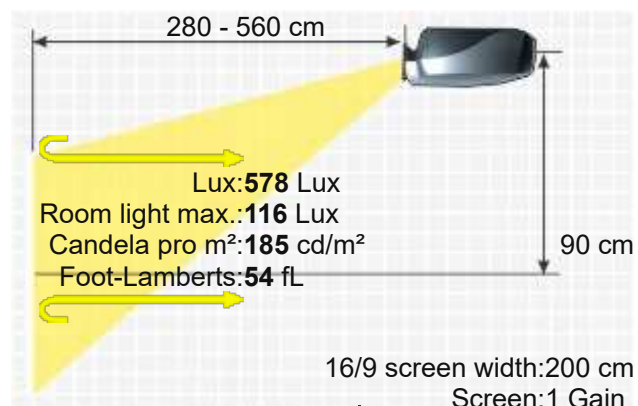

Key: 80 cm

Weight	15,80 kg / 34,83 lbs.
Keystone	Vert.: +/-16°
Illumination	-
Frequenz	-
Foot-Lamberts	54 fL / max. 366 cm screen width 185 cd/m ²
Features	■ Real Full HD 3D
	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ sRGB
	■ Gamma correction
	■ Remote control with backlight
Screen Mirroring	■ Lan network compatible.
	■ Built-in auto lens shutter
Screen Mirroring	-

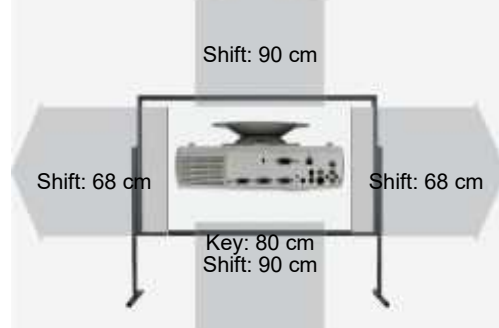

Optional accessories

	Nackte Philips Lampe	NLMP23060	124,05 €
	Lampe Ruby	Ruby-LMP23060	113,41 €
	Lampe Original	R8760004	EOL €
	Kompatible Lampe	LMP-K23060	50,94 €
	Deckenhalterung 220	Halterung45	83,60 €

Status 2015 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2015-03-05 11:04:53

Data

More Details



HCinema

<https://www.projector-database.com/pro/cineversumblackwingonemk2015-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.