

DreamVision Eos 1-L

DREAMVISION EOS 1-L



A brief introduction to the DreamVision Eos 1-L. The LCOS projector has a UHD (4K+2K) 4096 x 2160 resolution and a contrast of 40000:1. The manufacturer specifies a lamp life of 4500 hours, which equates to over 6.2 years with a daily viewing time of 2 hours. Including a lens shift function, which provides freedom during installation. The projector can illuminate an image width of up to 431 cm thanks to its 1800 Ansi lumens. In room lighting, however, the picture width should ideally be less than 287 cm. The model is also compatible with Full HD 1080P and 4K as well as 3D, meaning that all Blu-ray formats currently available can be recognized by the projector. The model was built by DreamVision in 2019 and is no longer current.



3 x 0,69" LCOS 4k Panels
UHD 19/10 Liquid Crystal on Silicon (LCOS)

Projector	1800	853 Lux (bei 200 cm Screen)
Contrast	40000:1	40000:1
Black Level	0,0450 min. Lumen	0,021 min. Lumen
Lens shift	Vert.: +/-80% Hori.: +/-34%	
Resolution	UHD (4K+2K) 4096 x 2160	
Video Modes	8.847.360 Pixel	
Disc Recognition	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p	
3D Compatibility	DVD HD Blu-ray 3D Blu-ray 4K UHD Blu-ray (60p)	
Application	Frame-Packing (Full HD 3D) Side-by-Side Top-and-Bottom	
Light Source	Homecinema Small screen width, rooms with very little ambient light below 100 lumens.	
Light Life	265W NSH Lamp	
	4500 h.	

Operating Costs

-

Focus

Powered

Zoom

Powered 2x

Objective

-

Throw Ratio

1,4-2,8:1

Audio

-

2x HDMI 2.0 (HDCP2.2) in

1x RS232C Din 9 pin in

1x RJ45 in

1x USB Typ A


1x 12V Trigger

Ceiling Mounting


Yes

Power

400W

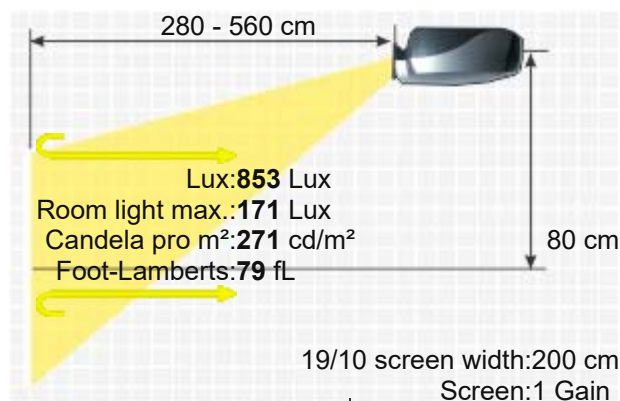

Size WxHxD	500 x 260 x 495 mm (19,7"x10,2"x19,5") 64,35 L/dm ³
Operating Noise	20 dB in Eco Mode
Weight	26,00 kg / 57,32 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	79 fL / max. 227 cm screen width 271 cd/m ²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Lens shift Funktion ■ Eco Mode ■ High Dynamic Range (HDR) ■ Lan network compatible.
Status Data	2019 Discontinued (EOL) // Last update of the data: 2023-08-04

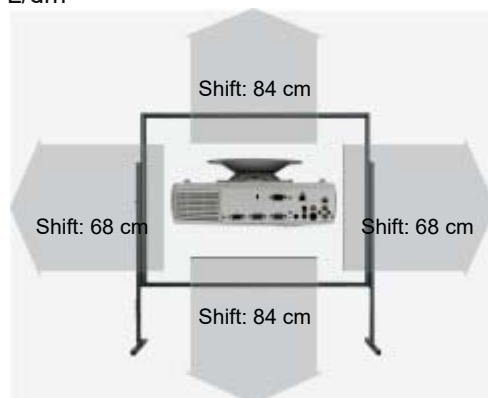

HCinema

<https://www.projector-database.com/pro/dreamvisioneos1l-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.