

Dukane DSP3



DUKANE DSP3



Brief Introduction

Beta 2.5

The Dukane DSP3 LCD projector has 2000 Ansi-Lumen, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. An image width of up to 389 cm is possible as the projector has 2000 Ansi lumens. However, if room light is available, the picture should be max. 259 cm wide. The model was built by Dukane in 2005 and is no longer current.

 3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

2000 / 1600 im Eco Mode

667 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

5,0000 min. Lumen

1,68 min. Lumen

Offset

XGA 1024 x 768

Resolution

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

NTSC, NTSC 4.43, PAL, MPAL, NPAL, PAL60, Component, SECAM, S-video, HDTV (1080i, 720p, 575i)

Media player formats: Mediaplayer

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

165W UHP Lamp

Articel Nr.: I-PRO 8755C

Light Life

2000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

F=1,7-1,9

Throw Ratio

1,50-1,81:1

Audio

1 x 1W

2 x D-sub 15pin in 1 x out

YUV in

Cinch Video in

Cinch Stereo in

USB für Maus in

RS232C

Mini Jack in und out



Ceiling Mounting

Yes

Power


240W

Size WxHxD

295 x 87,5 x 231 mm (11,6"x3,4"x9,1") 5,93 L/dm³

Operating Noise

37 / 31 dB in Eco Mode

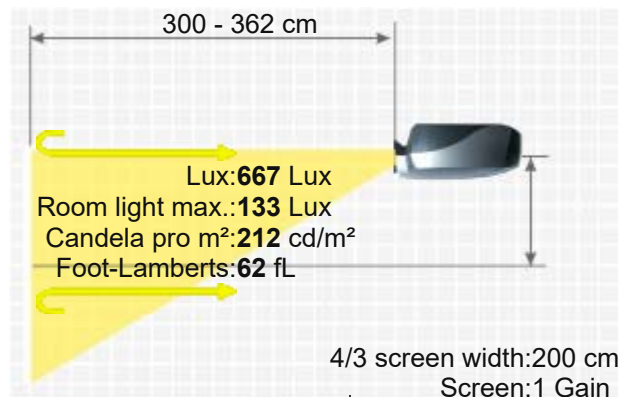


Key: 80 cm

Weight 2,49 kg / 4,41 lbs.
Keystone Vert.: +/-15°
Illumination -
Frequenz H-sync: 15-91 kHz
V-sync: 50-120 Hz
Foot-Lamberts 62 fL / max. 389 cm screen width
212 cd/m²

- Integrated Mediaplayer
- Freeze
- Eco Mode
- Kensington Slot
- Password protection
- digital zoom 4x
- camera and loudspeaker.

Status Data 2005 Discontinued (EOL) // Last update of the data: 2023-08-21

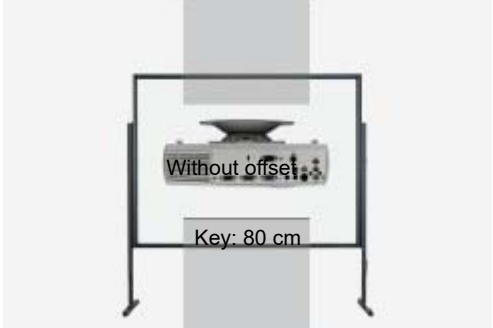

More Details



HCinema

<https://www.projector-database.com/pro/dukanedsp3-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.