

Dukane Image Pro 6645WA



DUKANE IMAGE PRO 6645WA



The Dukane Image Pro 6645WA model is a DLP projector with WXGA 1280 x 800 resolution and a contrast of 6000:1. The lamp life is up to 5000 hours, which converts to over 6.8 years at 2 hours per day. The integrated lens shift gives freedom when positioning the projector. An image width of up to 682 cm is possible as the projector has 4500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 455 cm. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. The projector can also play 1080P and 3D without any problems. The model was built by Dukane in 2016 and is no longer current.

 1 x 0,65" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Projector 4500
6000:1 full on/off
0,7500 min. Lumen

Screen 1800 Lux (bei 200 cm Screen)
6000:1 full on/off
0,3 min. Lumen

Lens shift Vert.: +59% -0% Hori.: +/-28%
WXGA 1280 x 800

Resolution 1.024.000 Pixel
UXGA 1600 x 1200 compressed

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility Frame-Packing (Full HD 3D) | Frame Sequential (3D Ready)

Application Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life 335W Lamp

5000 h.

Operating Costs -

Focus Manual

Zoom Manual 1,69

Objective F=2,0 f=18,2-31,1 mm

Throw Ratio 1,3-2,2:1

Audio 20W

HDMI mit MHL in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB in


Connections RS232C Din 9 pin in
RJ45 mit HDBaseT in



Ceiling Mounting Yes

Power -

Size WxHxD 362 x 139 x 306 mm (14,3"x5,5"x12") 15,4 L/dm³

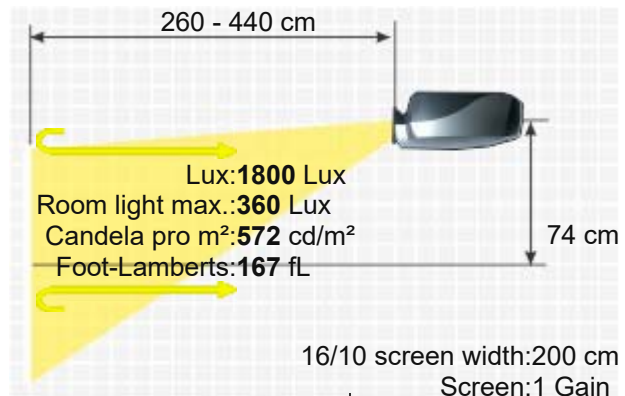

Operating Noise 39 / 31 dB in Eco Mode

Weight 5,20 kg / 11,46 lbs.
Keystone Vert.: +/-30°
Hori.: +/-25°

Illumination -

Frequenz H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts 167 fL / max. 682 cm screen width
572 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Lens shift Funktion
 - Blackboard Modus
 - Eco Mode
 - Dynamic iris
 - PJLink™
 - Control via web browser
 - Optional Wi-Fi network compatible.
 - Optional LAN network compatible.
 - Crestron®-Software compatible.

Status 2016 Discontinued (EOL) // Last update of the data: 2023-09-20
Data Created: 2016-05-17 09:48:56

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro6645wa-en.html>

