

Epson USA PowerLite Home Cinema 2000



EPSON USA POWERLITE HOME CINEMA



Brief Introduction

Beta 2.5

The Epson USA model PowerLite Home Cinema 2000 is an LCD projector with HDTV 1920 x 1080 resolution and a contrast of 13000:1. The lamp of the projector is specified with 5000 hours lamp life, which is equivalent to over 6.8 years at 2 hours per day. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. An image width of up to 431 cm is possible as the projector has 1800 Ansi lumens. However, if there is room light, the image should be max. 287 cm wide. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. The model is also Full HD 1080P and 3D compatible. The model was built by Epson USA in 2013 and is no longer current.

Display Type



3 x LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Ansi-Lumen

1800

800 Lux (bei 200 cm Screen)

Contrast

13000:1 full on/off

13000:1 full on/off

Black Level

0,1385 min. Lumen

0,062 min. Lumen

Offset

-

Resolution

HDTV 1920 x 1080
2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

200W UHE Lamp
Articel Nr.: V13H010L78

Light Life

5000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,58-1,72 f=16,9-20,28 mm

Throw Ratio

1,22-1,47:1

Audio

2W Mono

Connections

2 x HDMI 1.4 mit MHL in
D-sub 15pin in
Cinch Video in
Cinch Stereo in
Mini Jack Audio out
USB in
RS232C Din 9 pin in

Ceiling Mounting

Yes

Power

283 / 234W Im Eco Mode

Size WxHxD


-

Operating Noise

37 / 29 dB in Eco Mode

Weight

-

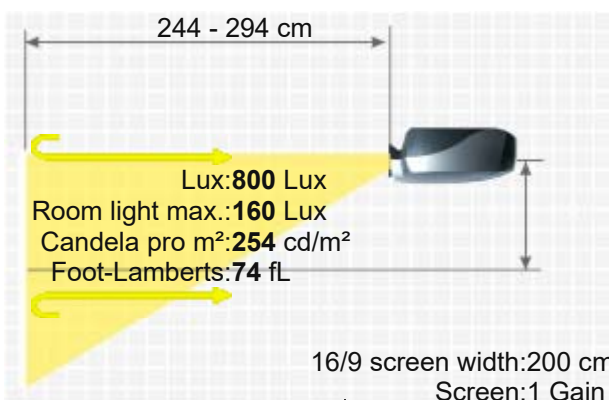

Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	-
Foot-Lamberts	74 fL / max. 431 cm screen width 254 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Automatic and manual vertical keystone correction
Status Data	2013 Discontinued (EOL) // Last update of the data: 2023-09-20



More Details



HCinema

<https://www.projector-database.com/pro/epsonhomecinema2000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.