

Epson USA PowerLite Home Cinema 725HD

EPSON USA POWERLITE HOME CINEMA



The PowerLite Home Cinema 725HD LCD has 2800 Ansi lumens, a contrast of 12000:1 and a WXGA 1280 x 800 resolution. The manufacturer, Epson USA, specifies a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. Including an integrated media player with which files can be played directly. Built-in horizontal and vertical keystone correction provides freedom when positioning the projector. 2800 Ansi lumens ensure that a picture width of 538 cm is also possible. However, if room light is available, the picture should be a maximum of 359 cm wide. Furthermore, the projector can play 1080P without any problems. The model was built by Epson USA in 2013 and is no longer current.

Brief Introduction
Beta 2.5

Display Type

3 x 0,59" LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

Projector 2800
Screen 1120 Lux (bei 200 cm Screen)

Contrast

12000:1 full on/off
12000:1 full on/off

Black Level Offset

0,2333 min. Lumen
0,093 min. Lumen

Resolution

WXGA 1280 x 800
1.024.000 Pixel
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Video Modes

Media player formats: jpg bmp gif png fse sit pdf MPEG-2 MPEG-4 ASP MPEG-4 AVC WMV9 Motion JPEG

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHE Lamp
Articel Nr.: V13H010L78

Light Life

4000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,58-1,72 f=26,9-20,28 mm

Throw Ratio


1,30-1,56:1

Audio

1 x 2W

Connections

HDMI in
D-Sub 15pin in
S-Video in
Cinch Video in
Cinch Stereo in

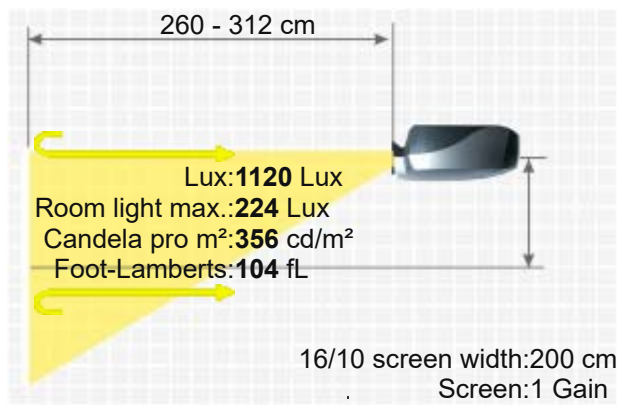

Ceiling Mounting	USB Typ A, B
Power	Yes
Size WxHxD	283 / 207W Im Eco Mode
Operating Noise	297 x 77 x 234 mm (11,7"x3"x9,2") 5,35 L/dm³
	37 / 29 dB in Eco Mode


Weight	2,40 kg / 4,41 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	Hori.: +/-30°
	-

Frequenz	-
----------	---

Foot-Lamberts	104 fL / max. 538 cm screen width
	356 cd/m²

Features	■ Full HD 1080P compatible
	■ Integrated Mediaplayer
	■ Freeze
	■ Eco Mode
	■ Automatic and manual vertical keystone correction
	■ Kensington Slot
	■ Password protection
	■ Overscan adjustable

Status	2013 Discontinued (EOL) // Last update of the data: 2023-08-30
Data	Created: 2013-09-05 09:03:50

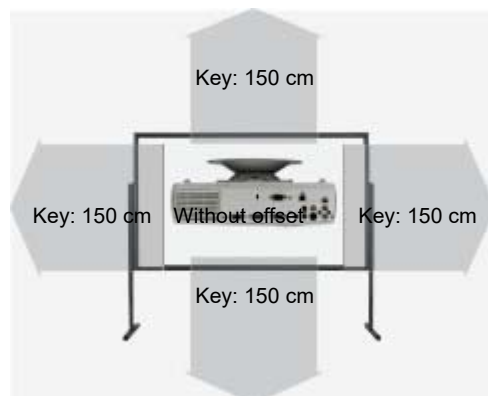

More Details



HCinema

<https://www.projector-database.com/pro/epsonhomecinema725hd-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.