


Epson USA BrightLink 536Wi





Brief Introduction


Beta 2.5

The BrightLink 536Wi LCD projector from Epson USA has 3400 Ansi lumens, a contrast of 16000:1 and a WXGA 1280 x 800 resolution. The manufacturer specifies a lamp life of 5000 hours, which is over 6.8 years if enjoyed for two hours a day. Including an integrated media player with which files can be played directly. The horizontal and vertical keystone correction provides leeway when setting up. 592 cm picture width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 395 cm. The projector offers an interactive whiteboard function for interactive training courses and presentations. Furthermore, the projector can play 1080P without any problems. The model was built by Epson USA in 2014 and is no longer current, but is still a popular projector in our database.

Display Type	 3 x 0,59" LCD TFT Panel WXGA 16/10 Liquid Crystal Display	
Ansi-Lumen	Projector 3400 / 1900 im Eco Mode	Screen 1360 Lux (bei 200 cm Screen)
Contrast	16000:1 full on/off	16000:1 full on/off
Black Level Offset	0,2125 min. Lumen	0,085 min. Lumen
Resolution	WXGA 1280 x 800 1.024.000 Pixel UXGA 1600 x 1200 compressed	
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p, 1080p Media player formats: .jpg .bmp .gif .png .avi	
Application	Whiteboard Training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.	
Light Source	215W UHE Lamp Articel Nr.: ELPLP87	
Light Life	5000 h.	
Operating Costs	-	
Focus	Manual	
Zoom	No Zoom	
Objective	F=1,6 f=6,4mm	
Throw Ratio	0,48:1	
Audio	16W 2 xHDMI in D-sub 15pin in und out Cinch Video in Cinch Stereo in S-Video in Mini Jack Audio in und out USB Typ A,B in RS232C Din 9 pin in RJ45 in	
Connections		
Ceiling Mounting	Yes	
Power	315 / 230W Im Eco Mode	
Size WxHxD	344 x 94 x 314,5 mm (13,5"x3,7"x12,4") 10,15 L/dm³	
Operating Noise	37 / 29 dB in Eco Mode	

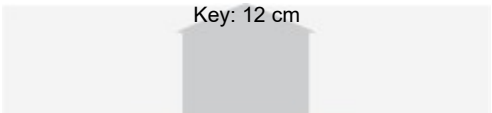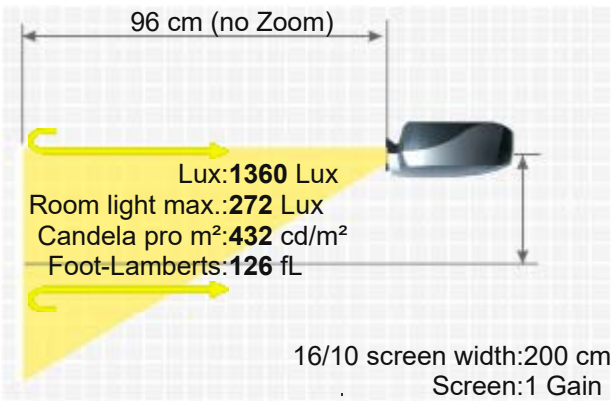

Weight	3,70 kg / 6,61 lbs.
Keystone	Vert.: +/-7° Hori.: +/-5°
Illumination	-
Frequenz	H-sync: 15-92 kHz V-sync: 50-85 Hz
Foot-Lamberts	126 fL / max. 592 cm screen width 432 cd/m²
Features	<ul style="list-style-type: none"> ■ Full HD 1080P compatible ■ Integrated Mediaplayer ■ Eco Mode ■ Lan network compatible. ■ Short-throw projector ■ Whiteboard function.
Status	2014 Discontinued (EOL) // Last update of the data: 2023-08-30
Data	Created: 2015-01-13 14:08:00

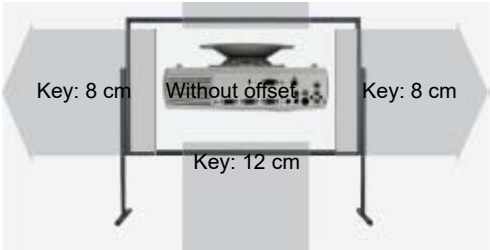

More Details



HCinema

<https://www.projector-database.com/pro/epsonusabrightlink536wi-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.