

InFocus Work Big IN34/EP

INFOCUS WORK BIG IN34/EP



Brief Introduction

Beta 2.5

With the Work Big IN34/EP, manufacturer InFocus offers a DLP projector with XGA 1024 x 768 resolution and a contrast of 1000:1. The projector can illuminate an image width of up to 435 cm thanks to its 2500 Ansi lumens. In room light, however, the image width should ideally be less than 290 cm. The model was built by InFocus in 2006 and is no longer current.



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

2500
1000:1 full on/off
2,5000 min. Lumen
833 Lux (bei 200 cm Screen)
1000:1 full on/off
0,836 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

SXGA+ 1400 x 1050 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W SHP Lamp
Articel Nr.: SP-LAMP-019

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=26-32 mm

Throw Ratio

1,83-2,27:1

Audio

3W Mono


Connections

DVI M1DA
D-sub 15pin in und out
S-Video in
Cinch Video in
Mini jack in und out



Ceiling Mounting

Yes

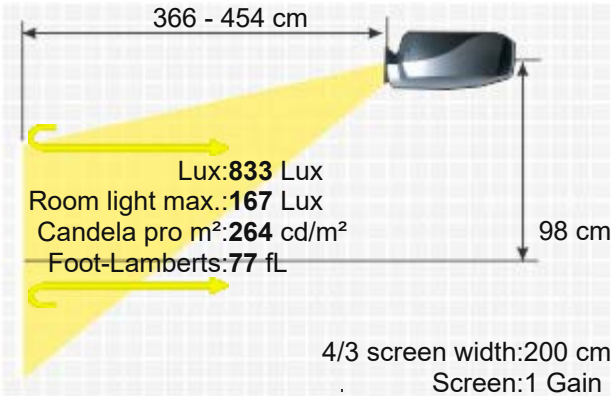

Power 260W
Size WxHxD 218 x 75 x 263 mm (8,6"x3"x10,4") 4,3 L/dm³
Operating Noise 35dB

Weight 2,40 kg / 5,29 lbs.
Keystone Vert. +30°-25°
Illumination -
Frequenz H-sync: 16-85 kHz
V-sync: 48-85 Hz
Range max.: 140 MHz
Foot-Lamberts 77 fL / max. 435 cm screen width
264 cd/m²

- Features -
- | | |
|---------------------------|--------------|
| Bulb only | NLMP402 |
| Lamp ruby | Ruby-LMP402 |
| Lamp original | SP-LAMP-019 |
| Compatible lamp | LMP-K15455 |
| Universal Remote original | Fernb-uni-V3 |
- Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15456>

Optional Lenses
Status 2006 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/infocusworkbigin34-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

