JVC DLA RS49 E/U

D-ILA | 3D FULL HD | Full HD 1080 | Lens Shift | Motor | < 30 dB Leise | Netzwerk | 12V Trigger | sRGB

Brief Introduction Beta 2.5	The JVC DLA RS49 E/U high-end home cinema 3D DILA projector has 1200 Ansi lumens, a contrast of 60,000:1 and HDTV 1920 x 1080 resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. The built-in lens shift function provides freedom when setting up. An image width of up to 352 cm is possible, as the projector has 1200 Ansi lumens. However, if room light is available, the image should be a maximum of 235 cm wide. The model is also compatible with Full HD 1080P and 4K (compressed) as well as 3D, meaning that all Blu-ray formats currently available can be recognized by the projector. At just 20 decibels, the device is one of the quieter projectors. The model was built by JVC in 2013 and is no longer current, but is still very popular in our projector database.
Display Type	3 x 0,7" DILA Chip HDTV 16/9 Direct-Drive Image Light Amplification (D-ILA)
Ansi-Lumen	Projector: 1200 / Screen: 533 Lux (bei 200 cm Screen)
Contrast	Projector: 60000:1 full on/off / Screen: 60000:1 full on/off
Black Level	Projector: 0,0200 min. Lumen / Screen: 0,009 min. Lumen
Lens shift	Vert.: +/-80% Hori.: +/-34%
Resolution	HDTV 1920 x 1080 2.073.600 Pixel UHD (4K+2K) 4096 x 2160 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (30p, ~~60p~~) (komprimiert)
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready) | 2D-zu-3D Video Converter
Application	High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	NSH 230W Lamp Article Nr.: PK-L2312U
Light Life	4000 h.
Operating Costs	13,89% / 0,1 €
Focus	Powered
Zoom	Powered 2
Objective	F=3,2-4,0 f=21,4-42,80 mm
Throw Ratio	1,4-2,8:1
Audio	Nein
Connections	2 x HDMI 1.4a YUV in RS232C RJ45 in 12V Trigger out

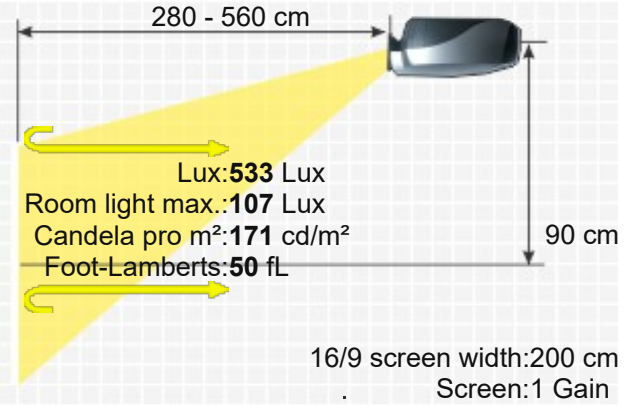

JVC DLA RS49 E/U

Ceiling Mounting	Yes, is possible.
Power	360W
Size WxHxD	455 x 179 x 472 mm (17,9"x7"x18,6") 38,44 L/dm³
Operating Noise	20dB

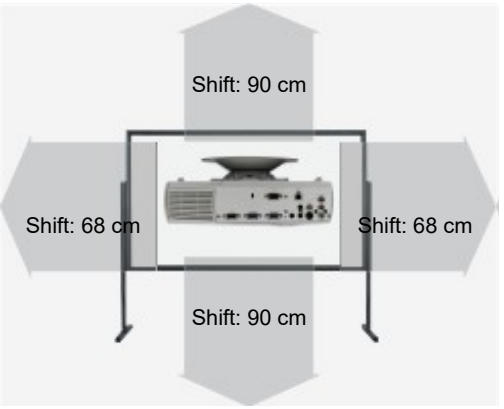

Weight	15,10 kg / 33,07 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	50 fL / max. 352 cm screen width 171 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Lens shift Funktion ■ sRGB ■ Gamma correction ■ Remote control with backlight ■ Lan network compatible.
Screen Mirroring	-

Optional accessories

	Nackte Philips Lampe	NLMP23601	124,05 €
	Lampe Ruby	Ruby-LMP23601	113,41 €
	Lampe Original	PK-L2312U / PK-L2312UG	417,31 €
	Kompatible Lampe	LMP-K21552	50,94 €
	Deckenhalterung 220	Halterung45	83,60 €

Status Data: 2013 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2013-09-11 14:28:12

More Details: HCinema
https://www.projector-database.com/pro/jvcdlars49-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.