



The SD205R is designed to be small, lightweight, and at 2000 ANSI lumens it is powerful enough to impress any audience.

Value for the Cost Conscious

The SD205R is an excellent choice for the cost conscious user who does not want to compromise on performance, quality and reliability. This ultra-portable DLP™ projector only weighs 5.3 lbs, native SVGA resolution, an amazing 2000:1 contrast ratio and shines bright at 2000 ANSI lumens for an impressively sharp images. It provides flexible connectivity options for both video and data, and is backed by Mitsubishi's exclusive ERA Warranty programs.


- DLP™ technology
- Native SVGA (800x600) resolution
- 2000 ANSI lumens and a contrast ratio of 2000:1
- Lightweight at only 5.3 lbs
- Anti-theft security hook
- Flexible connectivity options with support for monitor loop through
- 3-years or 10,000-hours on the TI-DLP DMD Chip, 2-years parts and labor, 2-years Express Replacement Assistance (ERA), 90-days lamp warranty

SD205R

SVGA DLP™ PROJECTOR



SCREEN			DISTANCE FROM SCREEN (L)				Hd	
Diagonal Size	Width		Height		Max Zoom		Min Zoom	
	inch	cm	inch	cm	inch	m	inch	cm
40	102	81	24	61	50	1.3	60	1.5
60	152	122	36	91	76	1.9	91	2.3
80	203	163	48	122	101	2.6	121	3.1
100	254	203	60	152	126	3.2	151	3.8
120	305	243	72	183	149	3.8	181	4.5
140	356	283	84	213	174	4.4	211	5.2
160	407	323	96	243	199	5.0	241	6.0
180	458	363	108	273	224	5.7	271	6.8
200	509	403	120	303	250	6.3	301	7.6
220	560	443	132	333	275	7.0	331	8.4
240	611	483	144	363	300	7.6	361	9.1
260	662	523	156	393	325	8.3	391	9.9
280	713	563	168	423	350	8.9	421	10.6
300	764	603	180	453	375	9.5	451	11.4

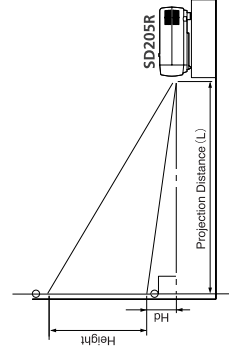

PRESENTATION PRODUCTS

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.

Presentation Products Division
Toll Free: 888.307.0349
Email: ppdinfo@ndea.com
www.mitsubishi-presentations.com



Canada

Mitsubishi Electric Sales Canada Inc.
Information Technologies Group
Phone: 905.475.7728
www.mitsubishielectric.ca



©2006 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. The DLP™ logo and DLP™ medallion are trademarks of Texas Instruments. Microsoft, Windows, and the Windows logo are registered trademarks of Microsoft Corporation. Mac and the Mac logo are trademarks of Apple Computer, Inc. registered in the U.S. and other countries. All other trademarks are the property of their respective holders.
*The projector lamp contains mercury. Please dispose of properly.
PP6022-05/06-15M-JTSD205R

DISPLAY TECHNOLOGY	0.55", 1-Chip DMD, 12 deg. DDR, DDP2000
RESOLUTION	800 x 600 (Total 480,000 pixels), 500 Video Lines
BRIGHTNESS	2000 ANSI lumens (1700lm low lamp mode)
CONTRAST RATIO	2000 : 1 (on/off)
ZOOM/FOCUS	Manual Focus & Zoom Lens
PROJECTION LENS	F= 2.4 (Wide) 100" @ 3.2 m (Wide)
THROW RATIO	1.56 - 1.87
OFF SET AXIS	7.9° - 1° up (No variable lens shift)
PICTURE SIZE	40-300 diagonal inches
SOURCE LAMP	205W (Shut Off Time 2000 Hrs) with Low Mode (164W: Shut Off Time 3000 Hrs)
PC COMPATIBILITY	Resolution: 640 x 400 - 800 x 600 + Compressed 1024 x 768 Sync on Green available
VIDEO COMPATIBILITY	NTSC/NTSC 4.43/PAL (including PAL-M, N) /SECAM/PAL-60, Component Video: 480/p (525/p), 576/p (625/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)
INPUT TERMINALS	RGB: Mini D-sub 15pin x 1 Audio: Stereo Mini Jack (ø 3.5mm) x 1 Video: RCA x 1 + S-VIDEO x 1
OUTPUT TERMINAL	RGB: Mini D-sub 15pin x 1 Audio: Stereo minijack (ø 3.5mm) x 1 (variable lineout)
COMMUNICATION TERMINAL	USB terminal for Page Up/Down (with optional cable)
SCANNING RATE	[H] 15 - 80 kHz, [V] 50 - 85 Hz, [Dot Clock] max 110 MHz
AUDIO SPEAKER	2 W Mono
HEIGHT ADJUSTER	Rearward lifting leg x 2, Push button front leg x1
HAND REMOTE UNIT	1) Projector fully control, 2) Power Point™ Page Up/Down via USB (with optional cable)
POWER CONSUMPTION	280W/2.9A
DIMENSION	10.28 x 8.58 x 3.42 inches (L x W x H)
WEIGHT	5.29 lbs.
POWER REQUIREMENTS	AC 100-240V, 50/60 Hz
FAN NOISE	36 dBA (Low mode: 30 dBA)
SUPPLIED ACCESSORIES	• Remote control • Power cable • VGA (D-sub) cable • Composite cable • Owner's manual (CD-ROM) • Quick Guide
OPTIONAL ACCESSORIES	Replacement Lamp (VLT-XD205LP), Ceiling Mount (PROJ-UCM), Hard Shell Rolling Case(DKT1-ATAC), Soft Carry Case (XL1-SSCC)
WARRANTY	3-years or 10,000-hours on the Ti-DLP DMD Chip, 2-years parts and labor, 2-years Express Replacement Assistance (ERA), 90-days lamp warranty



Unit measured in millimeters (mm)