

Megapower ML 123



MEGAPOWER ML 123



Brief Introduction

Beta 2.5

The Megapower ML 123 standard portable LCD projector has 2500 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 435 cm well. However, if room light is available, the picture width should ideally not exceed 290 cm. The model was built by Megapower in 2004 and is no longer current.

Display Type



3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2500

833 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

6,2500 min. Lumen

2,098 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, HDTV 720p, 1080i, 1080i, Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W Lamp

Articel Nr.: ML123Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,19

Objective

F=1,8-2,1 f=27-32 mm

Throw Ratio

1,9-2,25:1

Audio

1 x 1W

Connections

D-sub 15pin in und out
YUV in
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack
USB

Ceiling Mounting

Yes

Power


250W

Size WxHxD

279 x 72 x 265 mm (11"x2,8"x10,4") 5,32 L/dm³

Operating Noise

37dB

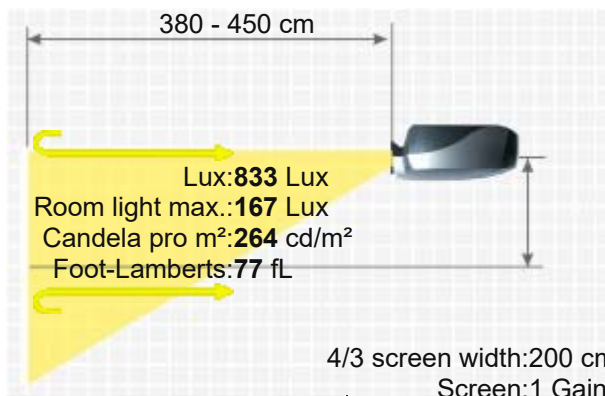

Weight

2,70 kg / 5,95 lbs.

Keystone

Vert.: +/-15°

Illumination

85%

Frequenz -

Foot-Lamberts 77 fL / max. 435 cm screen width

264 cd/m²

- Features
- Freeze
 - Picture-in-Picture
 - De-interlacer with 3:2 pull down

Status Data 2004 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/megapowerml123-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.