

MARQUEE® 1510 SIM *Ultra*




Features include:

- > High brightness: 1800 lumens
- > Native resolution 1365 x 1024
- > Compact and lightweight

Applications include:

- > Economical solution for high resolution application
- > Commercial-Off-The-Shelf (COTS) projector modified for special applications and general use

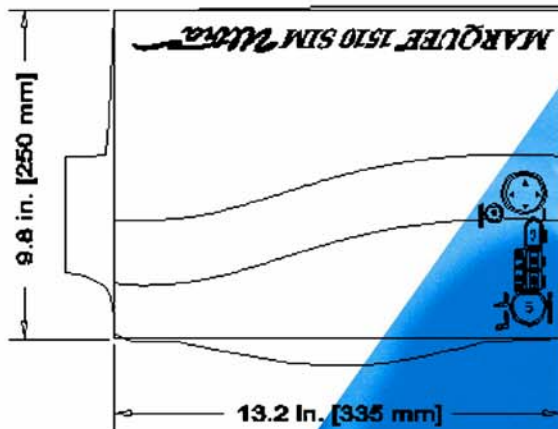


MARQUEE® 1510 SIM *Ultra* Specifications

VDCDS P/N

69874-10 MARQUEE® 1510 w/0.8:1 Lens

69874-11 MARQUEE® 1510 w/Std Zoom Lens

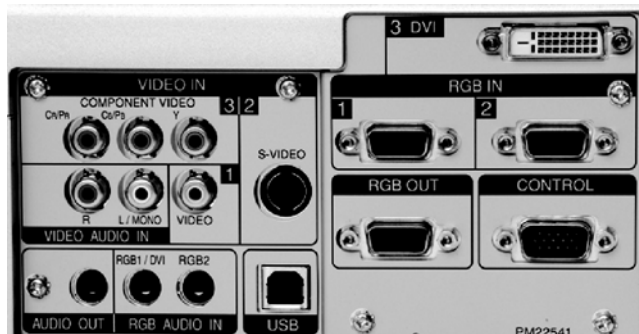

Shown with optional 0.8:1 Dome Lens

Modulation Device

Brightness (ANSI)

Uniformity

Contrast

Resolution (native)

Color Reproduction

Dynamic Scaling

Horizontal Scan

Vertical Scan

Dot Clock

Lens

Screen Size

Inputs

Compatibility

Features:

Audio

Control

Lamp

Lamp Life

Power

Power Consumption

Thermal Dissipation

Operating Temp.

Operating Humidity

Noise level

Projector Dimensions

Shipping Dimensions

Projector Weight

Shipping Weight

Std Accessories:

0.9" LCoS (Liquid Crystal on Silicon) x 3

1800 lumens

>80% across screen

600:1

1365 x 1024

16.7 million colors

VGA to UXGA

15-92 kHz

0 - 120 Hz

160 MHz

2.7-3.13 zoom (standard)

30"-300" diagonal

> Analog RGBHV inputs 1 & 2 via 15 pin D connectors

> Digital RGBHV input 3 via 24 pin DVI connector

> Composite video input 1 via RCA connector

> S-Video input 2 via 4 pin mini-DIN

> Component video input 3 via RCA YPrPb connectors

VGA, SVGA, XGA, SXGA, UXGA, Mac, SUN, SGI

> Multi Std Decoder

> Progressive scan video scaler w/ 3/2 pulldown

> Digital horizontal and vertical Keystone correction

> Picture-in-Picture

> Freeze function, Electronic Magnification 4X & Pan

> Color temperature 6500 +/- 1000K

> Built-in lamp timer

> IR Remote keypad

> Menus in 8 languages

> Auto Set up

Stereo L/R inputs Video & RGB; 1W speaker

RS-232 communication via 15-pin D-sub terminal

Remote mouse control via USB port

220 W user replaceable lamp

1500 hrs typical

Universal Power 100-240V, 50/60Hz

360W

1290 BTU

0-35 deg. C

20% to 80%

36 dB normal mode; 32 dB whisper mode

9.8" x 4.1" x 13.2" (24.9cm x 10.4cm x 33.5cm)

15" x 12" x 18"

12 lbs

20 lbs.

> IR Remote with laser pointer and batteries

> AC Power cable

> RGB cable (15 pin HD-sub)

> Lens cap

> User's Manual

> Component video cable

> Video/Audio cable

> Mouse cable

> Warranty card

Opt Accessories

Regulatory Approvals

Warranty

Spare lamp

UL/C-UL, CE; FCC-Class B

> 3 years projector parts and labor

> 90 days lamp

Due to constant research, product specifications are subject to change without notice.



Display Systems

7177 N. Atlantic Avenue, Cape Canaveral, Florida 32920-3719

Telephone: 321.784.4427

Fax: 321.784.6617

E-mail: sales@vdcdisplaysystems.com