

Optoma BR323

OPTOMA BR323



The Optoma BR323 3D DLP projector has 3200 Ansi lumens, a contrast of 15000:1 and an SVGA 800 x 600 resolution. The manufacturer specifies a lamp life of 5000 hours, which converts to over 6.8 years at 2 hours per day. Due to the brightness of 3200 Ansi lumens, a picture width of 493 cm is possible. In room light, the picture should be max. 329 cm wide. Playing 1080P and 3D is also no problem for the projector. The model was built by Optoma in 2014 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

 1 x 0,55" DC3 DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3200 1067 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off 15000:1 full on/off

Black Level

0,2133 min. Lumen 0,071 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W Lamp

Light Life

Articel Nr.: SP.8VH01GC01

5000 h. 6000 h. in Eco Mode

Operating Costs

7,14% / 0,03 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,41-2,55 f=21,8-23,98 mm

Throw Ratio

1,95-2,15:1

Audio

2W

Connections

HDMI 1.4a in


2 x D-sub 15pin in 1 x out

Cinch Video in

S-Video in

Mini Jack Audio in

RS232C Din 9 pin in

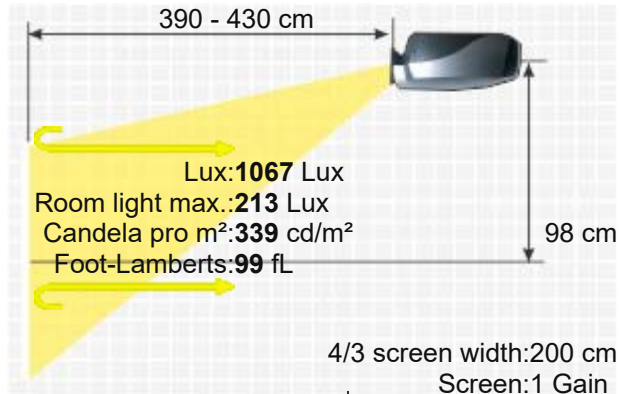



Ceiling Mounting: Yes
 Power: 253 / 194W in Eco Mode
 Size WxHxD: 314,6 x 101,7 x 222,60 mm (12,4"x4"x8,8") 7,04 L/dm³
 Operating Noise: 29 dB in Eco Mode

Weight: 2,35 kg / 5,18 lbs.
 Keystone: Vert.: +/-40°
 Illumination: 80%

Frequenz: H-sync: 15,3-91,10 kHz
 V-sync: 24-85 Hz

Foot-Lamberts: 99 fL / max. 493 cm screen width
 339 cd/m²

- Features:
- Real Full HD 3D
 - Full HD 1080P compatible
 - Eco Mode
 - Kensington Slot
 - Password protection

Optional: Remote control original SP.8VH02GC01
 Lamp original SP.8VH01GC01 / SP.73701GC01 / BL-FP190D

Status: Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro22462>
 2014 Discontinued (EOL) // Last update of the data: 2023-08-04
 Data: Created: 2014-08-29 12:01:58



More Details



HCinema

<https://www.projector-database.com/pro/optomabr323-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.