

AiLi PTV01A



Brief Introduction

Beta 2.5

The standard portable PTV01A LCD projector from AiLi has 1500 Ansi lumens, a contrast of 600:1 and a WVGA 854 x 480 resolution. The service life of the lamp is up to 6000 hours, which is over 8.2 years with a daily viewing time of 2 hours. A picture width of up to 393 cm is possible. However, the picture should be smaller in room light. We recommend max. 262 cm. This model is no longer available from AiLi.

Display Type

LCD TFT Panel
WVGA 16/9 Liquid Crystal Display

Ansi-Lumen

1500

Contrast

600:1 full on/off

Black Level

2,5000 min. Lumen

Offset

-

Resolution

WVGA 854 x 480
409.920 Pixel
XGA 1024 x 768 compressed

Video Modes

Pal, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

- Lamp

Light Life

6000 h. - 8000 h.

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

-

Audio

5W

Connections

D-sub 15pin in
2 x Cinch Video in
2 x Cinch Stereo in
S-Video in
Antenne

Ceiling Mounting

-

Power

-

Size WxHxD

320 x 110 x 250 mm (12,6"x4,3"x9,8") 8,8 L/dm³

Operating Noise

-

Weight

5,43 kg / 11,97 lbs.

Keystone

Vert.: +/-15°

Illumination

-

Frequenz

-

Foot-Lamberts

62 fL / max. 393 cm screen width
212 cd/m²


Features

-

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

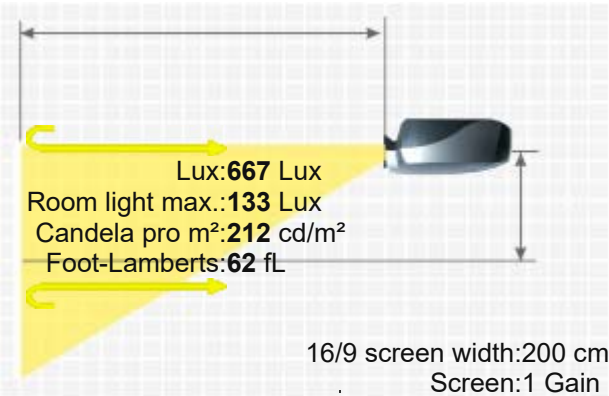



HCinema

<https://www.projector-database.com/pro/ailiptv01a-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.