

Optoma EW775UTI



OPTOMA EW775UTI



Brief Introduction

Beta 2.5

The Optoma EW775UTI DLP projector has 3500 Ansi lumens, a contrast of 15000:1 and an XGA 1024 x 768 resolution. This projector has a projection ratio of just 0.35:1. For a 2 m wide image, the projector only needs to be 70 cm away from the screen. The operating noise of just 30 decibels makes the projection quiet. The model was built by Optoma in 2013 and is no longer current, but is still very popular in our projector database.

 1 x 0,65" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

3500

1167 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off

15000:1 full on/off

Black Level

0,2333 min. Lumen

0,078 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

280W Lamp

Light Life

-

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=2,6 f=7,017mm

Throw Ratio

0,35:1

Audio

10W

HDMI 1.4b in

DVI in

D-sub 15pin in und out

Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack Audio in und out

USB in

RS232C Din 9 pin in

RJ45 in

12V Trigger out



Ceiling Mounting

Yes

Power


-

Size WxHxD

357 x 231 x 367 mm (14,1"x9,1"x14,4") 30,27 L/dm³


Operating Noise

30dB

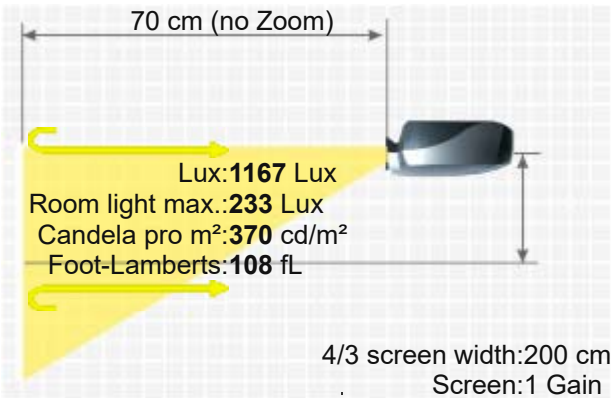

Key: 19 cm

Weight	7,50 kg / 16,53 lbs.
Keystone	Vert.: +/-15°
Illumination	85%
Frequenz	H-sync: 30-100 kHz V-sync: 50-120 Hz
Foot-Lamberts	108 fL / max. 515 cm screen width 370 cd/m²
Features	■ Lan network compatible. ■ Short-throw projector ■ Crestron®-Software compatible.
Status	2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	Created: 2013-12-05 17:27:58

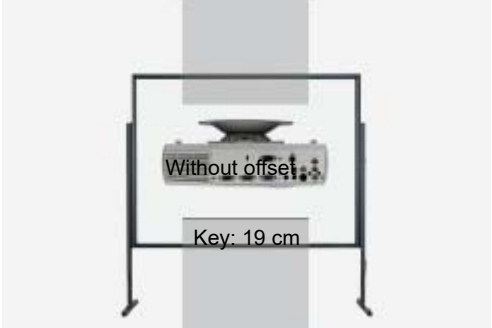

More Details



HCinema

<https://www.projector-database.com/pro/optomaew775uti-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.