

Alphapro compact c1024



ALPHAPRO COMPACT C1024



Brief Introduction

Beta 2.5

The standard portable Alphapro compact c1024 LCD projector has 900 Ansi lumens, a contrast of 250:1 and an XGA 1024 x 768 resolution. An image width of up to 261 cm is possible. However, the image should be smaller in room light. We recommend max. 174 cm. This model is no longer offered by Alphapro.

3 x 0,9" LCD psi TFT Panel
XGA 4/3 Liquid Crystal Display



Display Type

Ansi-Lumen

900

291 Lux (bei 203 cm Screen)

Contrast

250:1 full on/off

250:1 full on/off

Black Level

3,6000 min. Lumen

1.178 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

120W UHP Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,32

Objective

F=2,0-2,3 f=38-50 mm

Throw Ratio

2,08-2,73:1

Audio

3W Stereo

Cinch Video in

3 x Audio Eingang

1 x Audio Ausgang

D-sub 15pin in

VGA Ausgang

S Video Eingang

RS232C Controuler

Maus Port Eingang

Ceiling Mounting

Yes

Power


190W

Size WxHxD

341 x 225 x 122 mm (13,4"x8,9"x4,8") 9,36 L/dm³

Operating Noise

35dB

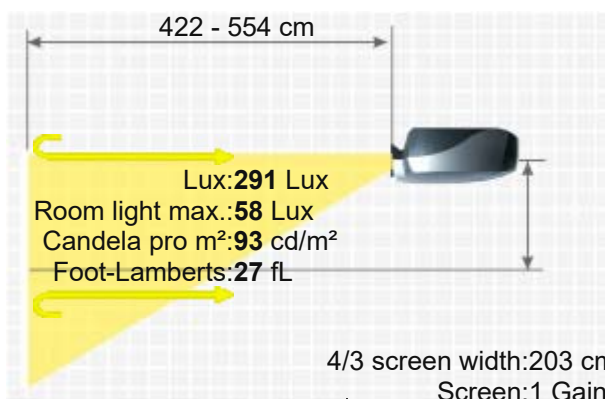

Weight

4,00 kg / 8,82 lbs.

Keystone

-

Illumination

90%

Frequenz

H-sync: 15-140 kHz

V-sync: 45-180 Hz

Foot-Lamberts

27 fL / max. 261 cm screen width

93 cd/m²

Features

■ Freeze

■ Remote control with laser pointer

Status
Data

- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/alphaprocompactc1024-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.