


Optoma UHD35

OPTOMA UHD35



A brief introduction to the UHD35: The Optoma 3D DLP projector offers 3600 Ansi lumens, a contrast of 1000000:1 and a UHD (4K2K) 3840 x 2160 resolution. Manufacturer Optoma specifies the lamp life as 10000 hours, which is over 13.7 years if enjoyed for two hours a day. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. Thanks to the brightness of 3600 Ansi lumens, an image width of 610 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 407 cm). Video signals 1080P and 4K as well as 3D are also no problem for the projector, which means that all Blu-ray formats currently available can be recognized by the projector. At 28 decibels, the projector is very quiet compared to other projectors. The model was built by Optoma in 2021 and is no longer current.



DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Projector	3600	1600 Lux (bei 200 cm Screen)
	1000000:1	1000000:1
	0,0036 min. Lumen	0,002 min. Lumen

Resolution: UHD (4K2K) 3840 x 2160
8.294.400 Pixel / FHD E-Shift
Video Modes: Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p
3D Compatibility: Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)
Application: Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source: 240W Lamp
Light Life: Articiel Nr.: SP.7G6R1GR01
4000 h. / 10000 h. in Eco Mode

Operating Costs: 11,9% / 0,05 €

Focus: Manual


Zoom: Manual 1,1

Objective: f=15,84-17,42 mm

Throw Ratio: 1,5-1,66:1

Audio: 1 x 10W

Connections: 2 x HDMI in
SPDIF
D-sub 15pin in
12 V Trigger out

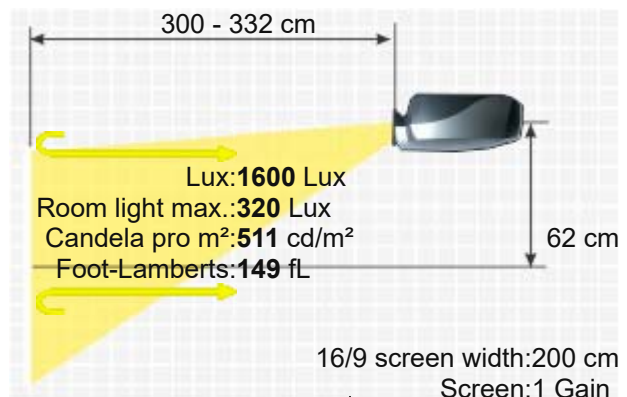

Mini Jack Audio in und out
USB in
RS232C Din 9 pin in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
305W/220W in Eco Mode
315 x 118 x 270 mm (12,4"x4,6"x10,6") 10,04 L/dm³
28 / 26 dB in Eco Mode

Weight
Keystone
Illumination

3,90 kg / 8,6 lbs.
Vert.: +/-40°
Hori.: +/-40°
-

Frequenz

H-sync: 31-135 kHz
V-sync: 24-120 Hz

Foot-Lamberts

149 fL / max. 610 cm screen width
511 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- High Dynamic Range (HDR)
- Optional Wi-Fi network compatible.

Optional

Lamp original SP.7G6R1GR01
Remote control original BR-3003B / SP.8ZE01GC01

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=25073>
2021 Discontinued (EOL) // Last update of the data: 2024-05-16
Created: 2021-02-25 15:32:04

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomauhd35-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.