

projectiondesign F1 SXGA 6



Brief Introduction

Beta 2.5

With the F1 SXGA 6, the manufacturer projectiondesign offers a standard portable DLP projector with SXGA 1280 x 1024 resolution and a contrast of 1000:1. Thanks to the horizontal and vertical keystone correction, the projector can be positioned very freely. 3000 Ansi lumens ensure that a picture width of 464 cm is also possible. However, if room light is available, the picture should be max. 309 cm wide. At just 28 decibels, the device is one of the quieter projectors. The model was built by projectiondesign in 2003 and is no longer current.



1 x 0,9" DDR DLP Chip
SXGA 5/4 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Projector 3000 Screen 910 Lux (bei 203 cm Screen)

Contrast

1000:1 full on/off 1000:1 full on/off

Black Level

3,0000 min. Lumen 0.913 min. Lumen

Offset

Resolution

SXGA 1280 x 1024
1.310.720 Pixel

Video Modes

HDTV (1080i, 720p, 576p/i, 480p/i) NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM
Standard-Portabel | External training and company presentations, as well as product

Application

presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

250W UHP Lamp
Articel Nr.: 400-0003-00

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,26

Objective

F=2,8-3,0 f=31,1-39,2 mm

Throw Ratio

1,7-2,2:1

Audio

2 x 2W Stereo

Connections

2 D sub 15 Pin (Analog RGB)
1 DVI (Digital RGB)
1 Component video (SDTV/HDTV)
1 S-video
1 Composite video
4 Stereo Mini jack audio
1 RS232 9-pin DSUB (control)
1 USB (Maus und firmware upgrade)
1 VGA monitor out
1 Stereo Mini jack audio



Ceiling Mounting

Yes

Power


350W

Size WxHxD

244 x 88 x 278 mm (9,6"x3,5"x10,9") 5,97 L/dm³

Operating Noise

28dB

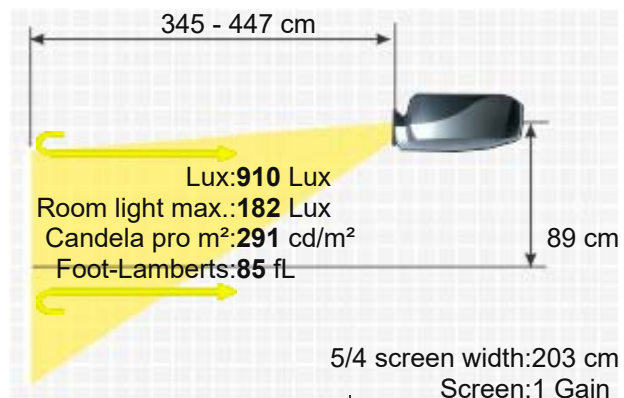

Weight	3,00 kg / 6,61 lbs.	
Keystone	Vertical und horizontal	
Illumination	-	
Frequenz	H-sync: 15,0-150,0 kHz	
	V-sync: 48-190 Hz	
	Range max.: 205 MHz	
Foot-Lamberts	85 fL / max. 464 cm screen width 291 cd/m²	
Features	■ Freeze	
	■ User logo	
	■ Eco Mode	
	■ Kensington Slot	
	■ sRGB	
	■ Gamma correction	
	■ 24/7 continuous operation capable	
	■ Remote control with laser pointer und mouse control	
	■ With 6-segment 4-speed colour wheel.	
	■ Faroudja De-interlacer	
Optional	Osram bulb only	NLMP3046
	Lamp ruby	Ruby-LMP3046
	Lamp original	R9801267 / 400-0003-00
	Compatible lamp	LMP-K15560
Order here: https://www.hcinema.de/lampen/shop-en.php?id=n3057		

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Fix Optional Lenses					
projectiondesign Wide	1:1	2 m	45% Fix		No Zoom
Status Data	2003 Discontinued (EOL) // Last update of the data: 2023-08-04				

More Details



HCinema

<https://www.projector-database.com/pro/projectiondesignf1sxga6-en.html>