

Asee ATP 2950



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Asee ATP 2950 LCD projector has 2000 Ansi lumens, a contrast of 600:1 and an SVGA 800 x 600 resolution. A picture width of up to 389 cm is possible as the projector has 2000 Ansi lumens. However, if room light is available, the picture should be max. 259 cm wide. The projector is no longer sold by the manufacturer.



3 x 0,9" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

2000

600:1 full on/off

3,3333 min. Lumen

667 Lux (bei 200 cm Screen)

600:1 full on/off

1,117 min. Lumen

Screen

SVGA 800 x 600

480.000 Pixel

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

150W SHP Lamp

-

-

Manual

Manual 1,3

F=1,7-2,0

-

-

D-sub 15pin in

Cinch Video in

S-Video in

Mini Jack

Yes

250W

250 x 80 x 315 mm (9,8"x3,1"x12,4") 6,3 L/dm³

-

3,20 kg / 7,05 lbs.

-

95%

H-sync: 13-80 kHz

V-sync: 50-85 Hz


62 fL / max. 389 cm screen width

212 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

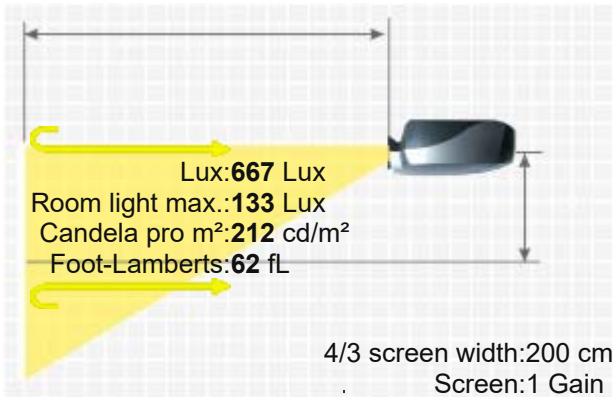



HCinema

<https://www.projector-database.com/pro/aseeatp2950-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.