

Ricoh PJ S2240

RICOH PJ S2240



A brief introduction to the Ricoh PJ S2240. The standard portable DLP projector has an SVGA 800 x 600 resolution and a contrast of 2200:1. The manufacturer Ricoh specifies a lamp life of 4500 hours, which is over 6.2 years with a daily viewing time of 2 hours. Thanks to the brightness of 3000 Ansi lumens, a picture width of 477 cm is possible. In room light, the picture should be max. 318 cm wide. The model was built by Ricoh in 2014 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

2200:1 full on/off

2200:1 full on/off

Black Level

1,3636 min. Lumen

0,455 min. Lumen

Offset

SVGA 800 x 600

Resolution

480.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W Lamp

Article Nr.: 512758

Light Life

4500 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

-

Throw Ratio

1,95-2,15:1

Audio

Nein

Connections

HDMI in

D-sub 15pin in

Cinch Video in


S-Video in

Ceiling Mounting

Yes, is possible.

Power

267 / 224W in Eco Mode

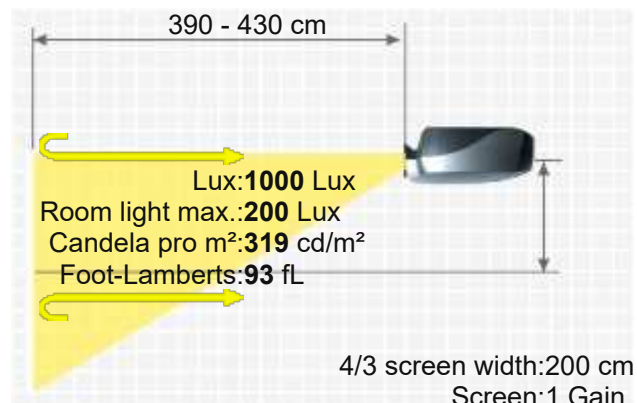

Size WxHxD 314,2 x 101,7 x 223,5 mm (12,4"x4"x8,8") 7,07 L/dm³
Operating Noise 34 / 31 dB in Eco Mode

Weight 2,60 kg / 4,41 lbs.
Keystone -
Illumination -
Frequenz H-sync: 30-100 kHz
V-sync: 50-85 Hz
Foot-Lamberts 93 fL / max. 477 cm screen width
319 cd/m²
Features ■ Freeze
■ Eco Mode
■ Lan network compatible.
Screen Mirroring -

Optional accessories

	Nackte Osram Lampe	NLMP23145	67,79 €
	Lampe Ruby	Ruby-LMP23145	102,91 €
	Lampe Original	512758	EOL €
	Kompatible Lampe	LMP-K23145	76,60 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2014 Discontinued (EOL) // Last update of the data: 2025-03-03



More Details



HCinema

<https://www.projector-database.com/pro/ricohpjs2240-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.