

Sony VPL CH355

SONY VPL CH355



The Sony VPL CH355 LCD projector has 4000 Ansi-Lumen, a contrast of 2500:1 and a WUXGA 1920 x 1200 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. The projector is equipped with a microphone jack plug and 12W speakers, so no additional speakers are required for presentations or training courses. Thanks to the brightness of 4000 Ansi lumens, a picture width of 643 cm is possible. The projector will also create slightly brighter rooms with a smaller picture width (we recommend max. 429 cm). Furthermore, the projector can play 1080P without any problems. The model was built by Sony in 2014 and is no longer current.



3 x 0,64" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Projector	4000 / 2600 im Eco Mode	Screen	1778 Lux (bei 200 cm Screen)
Contrast	2500:1 full on/off		2500:1 full on/off
Black Level	1,6000 min. Lumen		0,712 min. Lumen

Vert.: +/-5% Hori.: +/-4%

Resolution WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source 250W Lamp

Articel Nr.: LMP-C250

Light Life 3000 h. 5000 h. in Eco Mode

Operating Costs 28,57% / 0,12 €

Focus Manual


Zoom Manual 1,47

Objective -

Throw Ratio 1,5-2,2:1

Audio 1 x 12W

Connections 2 x HDMI in
Dsub 15 pin in und out
S-Video in
Cinch Video in
Cinch Stereo in
USB Typ A,B in
RS232C in
RJ45 mit HDBaseT in

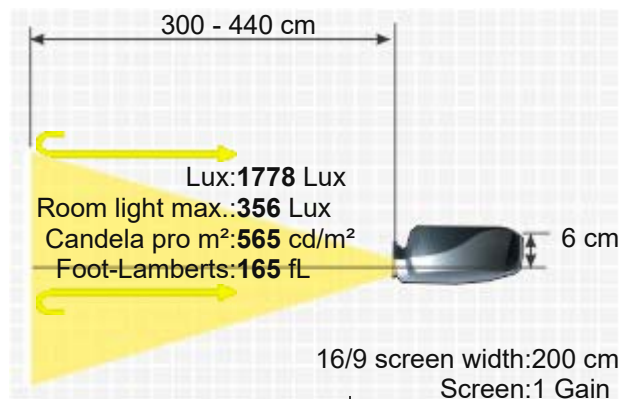

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Mikrofon in
Yes
334 / 254W in Eco Mode
406 x 113 x 330,5 mm (16"x4,4"x13") 15,14 L/dm³
-

Weight
Keystone
Illumination

5,70 kg / 12,57 lbs.
Vert.: +/-30°
Hori.: +/-20°
-

Frequenz

H-sync: 19-92 kHz
V-sync: 48-92 Hz

Foot-Lamberts

165 fL / max. 643 cm screen width
565 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Optional Wi-Fi network compatible.
- Lan network compatible.


Optional

Ceiling bracket original	PAM-310
Ceiling bracket original	PAM-210
Lamp original	LMP-C250
Remote control original	149046311 / RM-PJ8

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1513>
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2014-06-17 11:25:23

Data

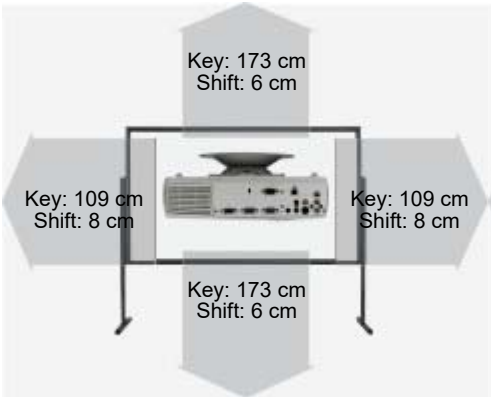

More Details



HCinema

<https://www.projector-database.com/pro/sonyvplch355-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.