

Sony VPL-EX575

SONY VPL-EX575



A brief introduction to the VPL-EX575: The Sony standard portable LCD projector offers 4200 Ansi lumens, a contrast of 20000:1 and an XGA 1024 x 768 resolution. The lamp in the projector is specified with a lamp life of 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. The integrated media player can play files directly. The model offers a microphone jack plug and 16W speakers, so no additional audio devices are required for presentations or training courses. 4200 Ansi lumens ensure that a picture width of 564 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 376 cm. The model is also Full HD 1080P compatible. The model was built by Sony in 2017 and is no longer current.

Brief Introduction Beta 2.5

Display Type



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector 4200 / 2300 im Eco Mode

Screen 1400 Lux (bei 200 cm Screen)

Contrast

20000:1 full on/off

20000:1 full on/off

Black Level

0,2100 min. Lumen

0,07 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: Fotos, Bilder und Grafiken.

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

225W Lamp

Articel Nr.: LMP-E221

Light Life

4000 h. 10000 h. in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,62

Objective

-

Throw Ratio


1,40-2,27:1

Audio

16W Mono

Connections

HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in

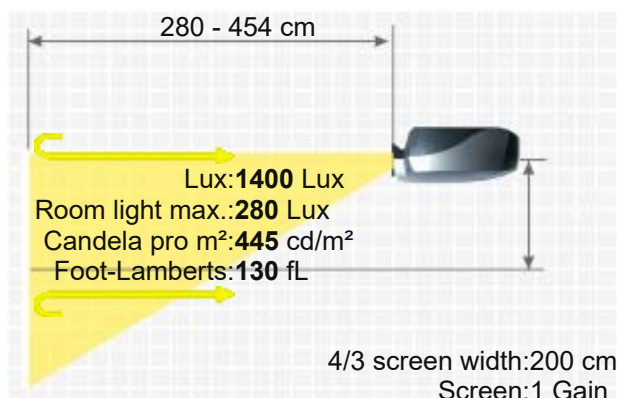

Mini Jack Audio in und out
 USB Typ A,B in
 RS232C Din 9 pin in
 RJ45 in
 Mikrofon in



Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes
 320W
 365 x 96,2 x 252 mm (14,4"x3,8"x9,9") 8,83 L/dm³
 35 / 29 dB in Eco Mode

Weight
 Keystone
 Illumination

3,90 kg / 8,6 lbs.
 Vert.: +/-30°
 -

Frequenz

H-sync: 15-92 kHz
 V-sync: 48-92 Hz

Foot-Lamberts

130 fL / max. 564 cm screen width
 445 cd/m²

Features


- Full HD 1080P compatible
- Integrated Mediaplayer
- Eco Mode
- Lan network compatible.

Optional

Lamp original LMP-E221
 Remote control original 149046311 / RM-PJ8

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=9001248>
 2017 Discontinued (EOL) // Last update of the data: 2023-08-04
 Created: 2017-02-07 14:15:05

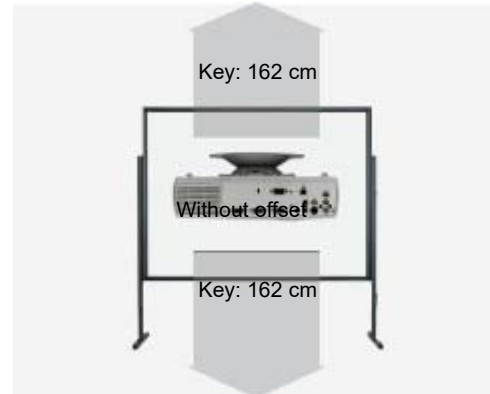

More Details



HCinema

<https://www.projector-database.com/pro/sonyvp575-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.