

Specktron PLS 200 ST



SPECKTRON PLS 200 ST



Brief Introduction

Beta 2.5

A brief introduction to the PLS 200 ST: The Specktron Game-Portable LED DLP projector offers 200 Ansi-Lumen, a contrast of 1000:1 and a SVGA 800 x 600 resolution. The manufacturer Specktron specifies a service life of 30,000 hours, which is over 20.5 years with a daily viewing time of 4 hours. A picture width of up to 123 cm is possible. However, the picture should be smaller in room light. We recommend max. 82 cm. The model was built by Specktron in 2012 and is no longer current.

Display Type



1 x 0,45" DLP DDP6400 Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 200

Screen 67 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

0,2000 min. Lumen

0,067 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Game-Portabel | Very portable, small-screen projections.

Very narrow picture width and rooms with very little light.

Light Source

LED

Light Life

30000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

-

Audio

1 x 3W

Connections

D-sub 15 pin in

Cinch Video in

Mini Jack Audio in

USB Typ A

SD Card Slot

Ceiling Mounting

-

Power

90W

Size WxHxD

172 x 50 x 134 mm (6,8"x2"x5,3") 1,15 L/dm³

Operating Noise

-

Weight

0,800 kg / 1,76 lbs.

Keystone

Vert.: +/-40° automatisch

Illumination

80%

Frequenz


H-sync: 15-90 kHz

V-sync: 50-80 Hz

Foot-Lamberts

6 fL / max. 123 cm screen width

21 cd/m²

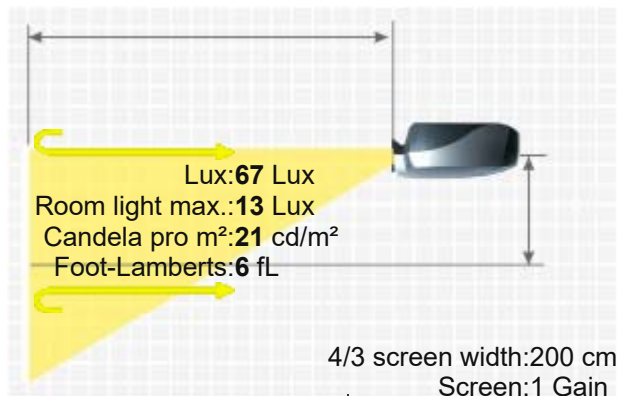

More Details



HCinema

<https://www.projector-database.com/pro/specktronpls200st-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.