

# Avio iP 03U



AVIO IP 03U



## Brief Introduction

Beta 2.5

## Display Type



1 x 0,7" DLP Chip  
XGA 4/3 Ti Digital Light Processing Chip

## Ansi-Lumen

Projector 3500

Screen 1167 Lux (bei 200 cm Screen)

## Contrast

Projector 1500:1 full on/off

Screen 1500:1 full on/off

## Black Level

Projector 2,3333 min. Lumen

Screen 0,78 min. Lumen

## Offset

-

## Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

## Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.

## Light Source

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

## Light Life

-

## Operating Costs

-

## Focus

Manual

## Zoom

Manual

## Objective

-

## Throw Ratio

-

## Audio

5W Mono

## Connections

D-sub 15 pin in  
S-Video in  
Cinch Video in  
Cinch Stereo in  
USB in

## Ceiling Mounting

Nein

## Power

400W

## Size WxHxD

290 x 140 x 365 mm (11,4"x5,5"x14,4") 14,82 L/dm³

## Operating Noise

-

## Weight

4,70 kg / 10,36 lbs.

## Keystone

Vert.: +/-15°

Hori.: +/-40°

## Illumination

-

## Frequenz

H-sync: 24,8-91,1 kHz

V-sync: 50-85 Hz


## Foot-Lamberts

108 fL / max. 515 cm screen width

370 cd/m²

## Features

-

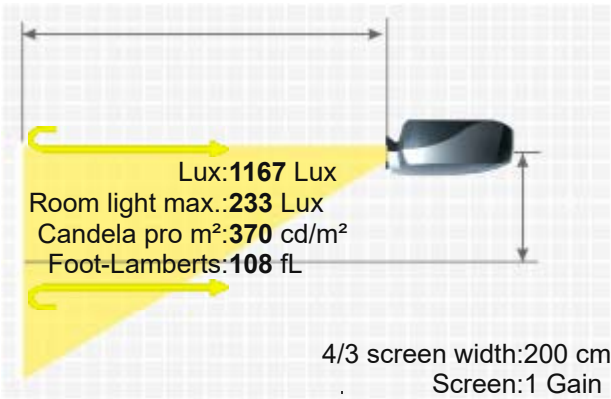

More Details



# HCinema

<https://www.projector-database.com/pro/avioip03u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.