

# TAXAN KG PH1001X



TAXAN KG PH1001X



## Brief Introduction

Beta 2.5

The standard portable TAXAN KG PH1001X BrilliantColor DLP projector has 4200 Ansi lumens, a contrast of 2300:1 and an XGA 1024 x 768 resolution. An image width of up to 564 cm is possible as the projector has 4200 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 376 cm is recommended. The model was built by TAXAN in 2009 and is no longer current. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.

## Display Type



1 x 0,7" DLP Chip  
XGA 4/3 Ti Digital Light Processing Chip

## Ansi-Lumen

Projector 4200

Screen 1400 Lux (bei 200 cm Screen)

## Contrast

Projector 2300:1 full on/off

Screen 2300:1 full on/off

## Black Level

Projector 1,8261 min. Lumen

Screen 0,609 min. Lumen

## Offset

## Resolution

XGA 1024 x 768

786.432 Pixel

## Video Modes

SXGA+ 1400 x 1050 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

## Light Source

280W Lamp

Articel Nr.: LPH001

## Light Life

-

## Operating Costs

-

## Focus

-

## Zoom

-

## Objective

F=2,6-2,81 f=26,01-29,84 mm

## Throw Ratio

1,83-2,1:1

## Audio

-

## Connections

HDMI in  
DVI-I mit HDCP  
D-sub 15 pin in und out  
YUV in  
S-Video in  
Cinch Video in  
USB Typ B  
RS232C

## Ceiling Mounting

Yes

## Power

-

## Size WxHxD

312 x 100 x 250 mm (12,3"x3,9"x9,8") 7,8 L/dm<sup>3</sup>

## Operating Noise

32 / 28 dB in Eco Mode

## Weight

3,60 kg / 7,94 lbs.

## Keystone

-


## Illumination

80%

## Frequenz

H-sync: 15-90 kHz

V-sync: 50-85 Hz

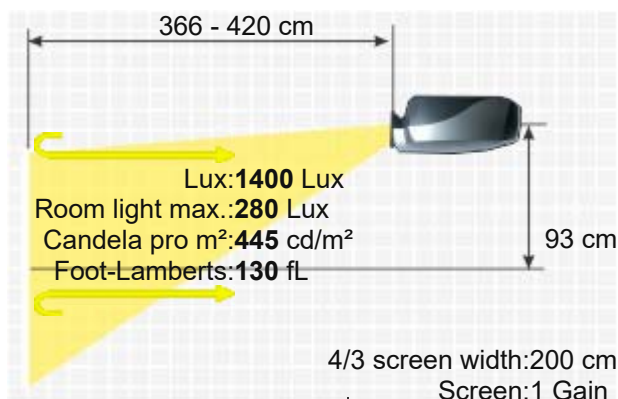

|               |                                                                                                                                               |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Foot-Lamberts | 130 fL / max. 564 cm screen width                                                                                                             |
|               | 445 cd/m²                                                                                                                                     |
| Features      | <ul style="list-style-type: none"><li>■ Blackboard Modus</li><li>■ Eco Mode</li><li>■ Password protection</li><li>■ BrilliantColor™</li></ul> |
| Status Data   | 2009 Discontinued (EOL) // Last update of the data: 2023-08-04                                                                                |

More Details



HCinema

<https://www.projector-database.com/pro/taxankgph1001x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.