

Viewsonic PJD7835HD

VIEWSONIC PJD7835HD



The Viewsonic PJD7835HD 3D DLP projector has 3500 Ansi lumens, a contrast of 22000:1 and an HDTV 1920 x 1080 resolution. The horizontal and vertical keystone correction provides leeway when setting up. The model offers a microphone jack plug and 16W speakers, so no additional audio devices are required for presentations or training courses. The projector can illuminate images up to 601 cm wide thanks to its 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 401 cm is recommended. A smartphone with MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz image mirroring (screen mirroring). The model is also Full HD 1080P and 3D compatible. The model was built by Viewsonic in 2015 and is no longer current.

Brief Introduction Beta 2.5

Display Type

1 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 3500

Screen 1556 Lux (bei 200 cm Screen)

Contrast

22000:1 full on/off

22000:1 full on/off

Black Level

Offset 0,1591 min. Lumen

0,071 min. Lumen

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

WUXGA 1920 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

-
Articel Nr.: RLC-096

Light Life

3000 h. 6000 h. in Eco Mode

Operating Costs

14,29% / 0,06 €

Focus

Manual

Zoom

Manual

Objective


-

Throw Ratio

-

Audio

1 x 16W

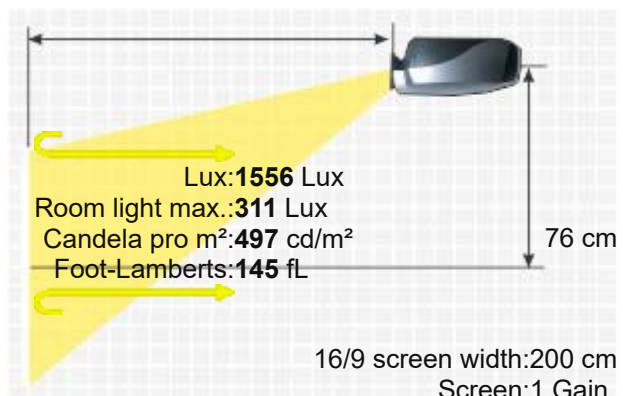

Connections	HDMI 1.4 mit MHL in D-sub 15pin in und out Mini Jack Audio in und out USB Typ A in RS232C Din 9 pin in Mikrofon in									
										
Ceiling Mounting	Yes									
Power	315W									
Size WxHxD	362 x 109 x 231 mm (14,3"x4,3"x9,1") 9,11 L/dm³									
Operating Noise	32 / 28 dB in Eco Mode									
Weight	2,80 kg / 6,17 lbs.									
Keystone	Vert.: +/-30°									
Illumination	Hori.: +/-30°									
	-									
Frequenz	-									
Foot-Lamberts	145 fL / max. 601 cm screen width 497 cd/m²									
Features	■ Real Full HD 3D									
	■ Full HD 1080P compatible									
	■ Eco Mode									
	■ Password protection									
	■ Optional Wi-Fi network compatible.									
	■ 2x digital zoom									
Optional	Lamp original	RLC-096								
	Remote control original	A-00010031, RC-JVS15-190								
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=23351									
	2015 Discontinued (EOL) // Last update of the data: 2023-09-20									
	Created: 2015-09-24 13:33:27									
Data										
										
More Details										
	 https://www.projector-database.com/pro/viewsonicpjd7835hd-en.html									

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.