

Wolf Cinema DLD 280 FD



WOLF CINEMA DLD 280 FD



Brief Introduction

Beta 2.5

The Wolf Cinema DLD 280 FD laser DLP projector has 5000 Ansi lumens, a contrast of 2000:1 and an HDTV resolution of 1920 x 1080. The manufacturer specifies a laser service life of 20000 hours, which converts to over 13.7 years at 4 hours per day. The built-in lens shift function provides freedom when setting up. 718 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 479 cm here. The model is also Full HD 1080P compatible. The model was built by Wolf Cinema in 2015 and is no longer current.

Display Type



1 x 0,65 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

5000

2222 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

2,5000 min. Lumen

1,112 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-15%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Laser

Light Life

20000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

HDMI 1.4a

DVI-D in

YUV in

D-Sub 15 pin in

Cinch Video in

S-Video in

USB Typ A, B in

RJ45 in

RS232C

Ceiling Mounting

Yes, is possible.

Power


520 / 340W in Eco Mode

Size WxHxD

467 x 191 x 506 mm (18,4"x7,5"x19,9") 45,13 L/dm³

Operating Noise

38 / 34 dB in Eco Mode

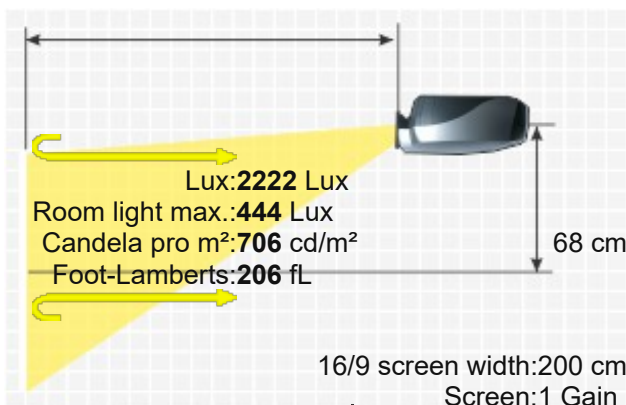

Weight

15,90 kg / 35,05 lbs.

Keystone

-

Illumination	-
Frequenz	-
Foot-Lamberts	206 fL / max. 718 cm screen width 706 cd/m²
Features	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ Eco Mode
	■ 24/7 continuous operation capable
	■ Lan network compatible.
Screen Mirroring	-
External video processor included.	



Optional accessories

	Deckenhalterung Länge 225 mm	Halterung45	85,80 €
---	------------------------------	-------------	---------

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
2.90-5.45:1	2.9-5.45:1	5.8-10.9 m	+/-60%	+/-15%	Powered
1.55-2.90:1	1.55-2.9:1	3.1-5.8 m	+/-60%	+/-15%	Powered
1.25-1.50:1	1.25-1.5:1	2.5-3 m	+/-60%	+/-15%	Powered
0.95-1.20:1	0.95-1.2:1	1.9-2.4 m	+/-60%	+/-15%	Powered

Status 2015 Discontinued (EOL) // Last update of the data: 2025-03-03
 Data Created: 2015-02-27 14:06:01

More Details



HCinema

<https://www.projector-database.com/pro/wolfcinemadId280fd-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
 HCinema is not responsible for any errors or omissions contained in product descriptions.