

Boxlight CP 745e



BOXLIGHT CP 745E



A brief introduction to the Boxlight CP 745e. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 500:1. An image width of up to 444 cm is possible. However, the image should be smaller in room light. We recommend max. 296 cm. This model is no longer offered by Boxlight.

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

2600
500:1 full on/off
5,2000 min. Lumen
867 Lux (bei 200 cm Screen)
500:1 full on/off
1,744 min. Lumen

XGA 1024 x 768
786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W NSH Lamp
Articel Nr.: CP720E-930

2000 h.

-

Manual

Manual 1,2

F=1,75-2,1 f=26,7-32 mm

1,88-2,25:1

1 x 2W

2 x D-sub 15pin in 1 x out
S-Video in
Cinch Video in
USB in
RS232C
Mini jack in




Yes

250W

309,9 x 96,5 x 269,2 mm (12,2"x3,8"x10,6") 7,98 L/dm³

33 / 30 dB in Eco Mode

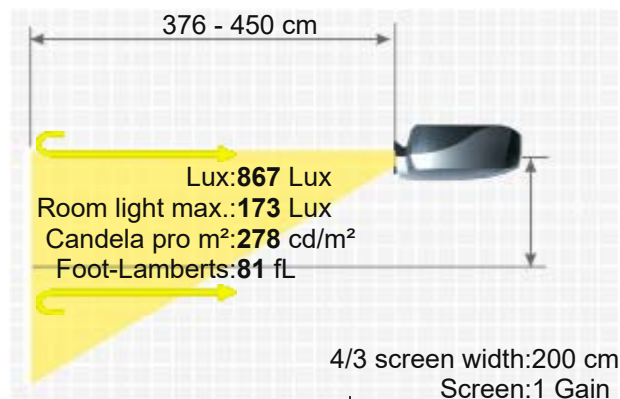

2,72 kg / 6 lbs.

Vert.: +/-30°

-

-

Frequenz H-sync: 15-100 kHz
V-sync: 43-100 Hz

Foot-Lamberts 81 fL / max. 444 cm screen width

278 cd/m²

- Features
- Eco Mode
 - Bulb only NLMP4931
 - 2 pin connector lampe ruby Ruby-LMP4931
- Optional
- Lamp (3 pin connector) original LMP19300
 - Lamp (2 pin connector) original CP720E-930
 - Compatible lamp LMP-K15624

Status Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15624>
2006 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/boxlightcp745e-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.