


Boxlight Pro80S3



BOXLIGHT PRO80S3



Brief Introduction Beta 2.5

A brief introduction to the Pro80S3: The boxlight DLP projector offers 8000 Ansi lumens, a contrast of 5000:1 and HDTV 1280 x 720 resolution. The integrated lens shift gives freedom when positioning the projector. 8000 Ansi lumens ensure that a picture width of 909 cm is also possible. The projector creates rooms with residual light with a smaller image width, max. 606 cm is recommended. On the market since 2008, the model is no longer offered by the manufacturer Boxlight. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.

Display Type

3 x LVDS DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

8000

3556 Lux (bei 200 cm Screen)

Contrast

5000:1 full on/off

5000:1 full on/off

Black Level

1,6000 min. Lumen

0,712 min. Lumen

Lens shift

Vert.: +40% -25% Hori.: +/-15%

Resolution

HDTV 1280 x 720

921.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 300W Lamp

Articel Nr.: PRO80S3-930

Light Life

1500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

-

Connections

DVI-D mit HDCP in
RS232C Din 9pin in

Ceiling Mounting

-

Power


770W / 2W standby

Size WxHxD

485 x 224 x 641 mm (19,1"x8,8"x25,2") 69,64 L/dm³

Operating Noise

37dB

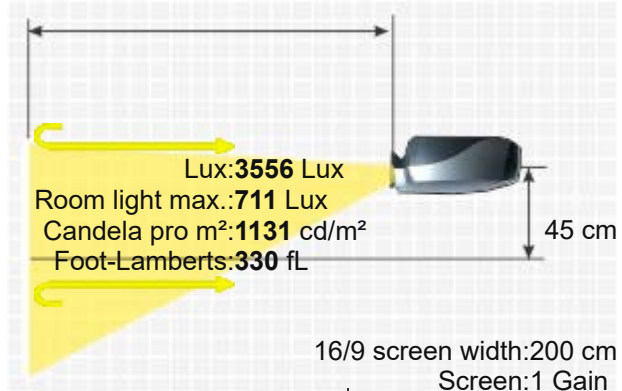

Weight

25,00 kg / 55,12 lbs.

Keystone

-

Illumination

85%

Frequenz

-

Foot-Lamberts

330 fL / max. 909 cm screen width
1131 cd/m²


■ Lens shift Funktion

■ Freeze

■ Blank (Black screen button)

■ Gamma correction

Features

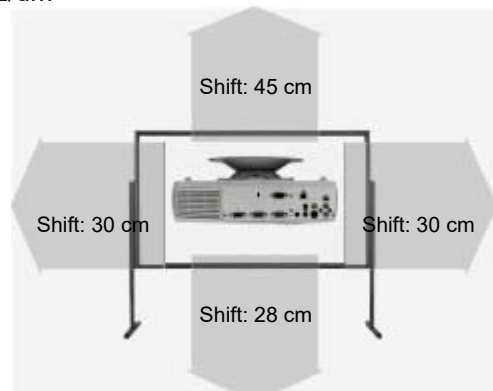

Name	Ratio	Optional Lenses			
		Distance	Shift V	Shift H	Zoom
		Zoom Optional Lenses			
3.6-5.6	3.6-5.6:1	7.2-11.2 m	40-25%	+/-15%	Powered
2.4-3.6	2.4-3.6:1	4.8-7.2 m	40-25%	+/-15%	Powered
1.8-2.4	1.8-2.4:1	3.6-4.8 m	40-25%	+/-15%	Powered
1.44-1.8	1.44-1.8:1	2.9-3.6 m	40-25%	+/-15%	
1.2-1.44	1.2-1.44:1	2.4-2.9 m	40-25%	+/-15%	Powered

Status Data 2008 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/boxlightpro80s3-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.