Seattle X22N

Specifications

BRIGHTNESS
2200 Lumens (Standard)
1650 Lumens (Economy)

RESOLUTION
1024x768 XGA (Native)
1600x1200 UXGA (Compatible)

DISPLAY TYPE
0.63" LCD w/ MLA x 3

CONTRAST RATIO
500 :1

ASPECT RATIO
4:3 Native
16:9 Compatible

THROW RATIO
1.45 ~ 1.73 (x screen width)

PROJECTION LENS
Manual Zoom & Focus

ZOOM RATIO
1.2:1

DIAGONAL IMAGE SIZE
40" - 300"

THROW DISTANCE
3.33' - 25' Feet

KEYSTONE
+/- 30º Vertical

LAMP
200 watt UHP

LAMP LIFE
3000 (Standard)
5000 (Economy)

INPUTS
VGA
DVI-I
Composite
S-Video
Component RCA Audio (R/L)
Audio x 2 (3.5mm)

OUTPUTS
VGA
Audio (3.5mm)

PROJECTOR CONTROLS
USB
RS232 (9-pin)
RJ45 LAN Connection

COMPATIBILITY
VGA,SVGA,XGA,SXGA,UXGA,Mac

EDTV / SDTV / HDTV
480i/p,576i/p,720p,1080i

FCC CERTIFICATION
FCC-B, UL, cUL, TUV, CD, CE, CCC

VIDEO COMPATIBILITY
NTSC, NTSC 4.43, PAL M/N 60, SECAM

AUDIO
1 x 8w Mono Speaker

DECIBEL RATING
33 dB (standard) / 30 dB (economy)

H-REFRESH RATE
31-92 kHz

V-REFRESH RATE
48-120 Hz

POWER SUPPLY
AC 110 ~ 240 Volts
50-60Hz (auto ranging)

POWER CONSUMPTION
285 Watts (standard)
<5w standby

DIMENSIONS (WxDxH)
12.8" x 10.24" x 3.8" Inches

WEIGHT
7.3 Lbs

WARRANTY
3 year parts & labor / 90 day lamp

Special features of the Seattle X22N include:

LAN Connectivity– For network installation. Manage your projectors through a web-based platform.

Quick Start Up and Shut Down— Start presenting quickly and only a 10 second cool down cycle when you finish!

Side Changing Lamp and Filter- Easy lamp installation and projector maintenance. No need to remove the projector from ceiling mount position.

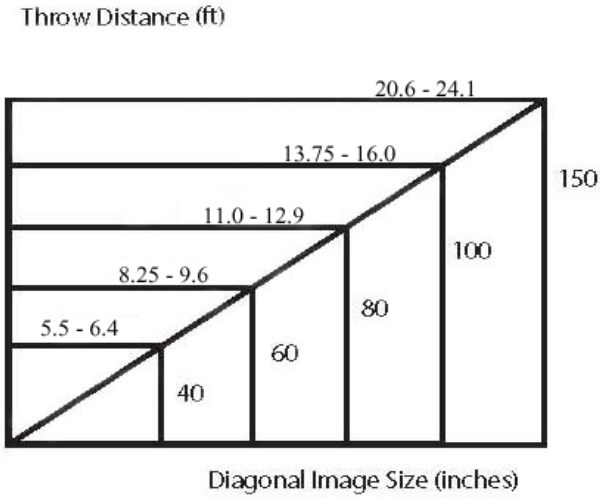

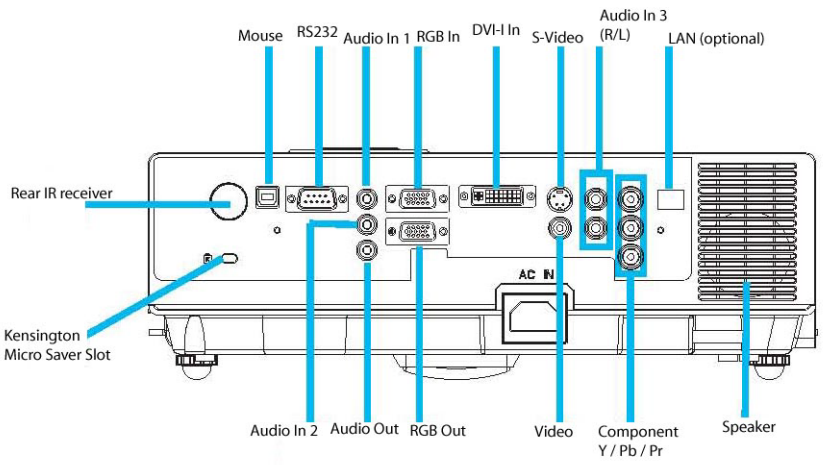

BOXLIGHT® CORPORATION

www.boxlight.com
800.762.5757
International 360.779.7901