

Compaq MP 1410

COMPAQ MP 1410



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Compaq model MP 1410 is a DLP projector with SVGA 800 x 600 resolution and a contrast of 400:1. An image width of up to 246 cm is possible. However, the image should be smaller in room light. We recommend max. 164 cm. The projector is no longer sold by the manufacturer.



1 Chip DLP

SVGA 4/3 Ti Digital Light Processing Chip

Projector

800

400:1 full on/off

2,0000 min. Lumen

Screen

259 Lux (bei 203 cm Screen)

400:1 full on/off

0.653 min. Lumen

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

NTSC, PAL, SECAM, NTSC 4.43

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

120W UHP Lamp

Articel Nr.: L1560a

1000 h.

-

Manual

No Zoom

-

-

8W

-

Yes

185W standby 65W

62 x 209 x 228,4 mm (2,4"x8,2"x9") 2,95 L/dm³

40dB

1,95 kg / 4,3 lbs.

-

90%

H-sync: 15-69 kHz


V-sync: 48-85 Hz

24 fL / max. 246 cm screen width

82 cd/m²

■ Kensington Slot

■ Picture-in-Picture

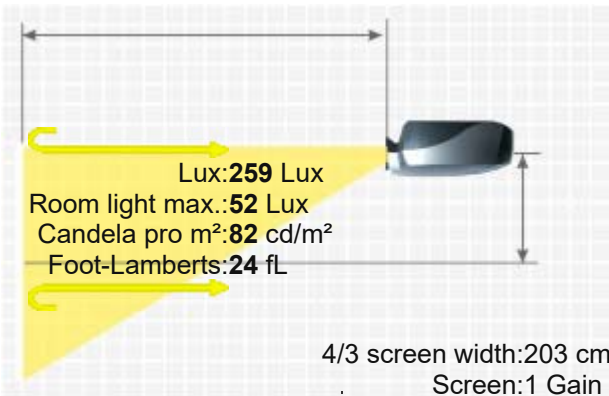

Osram bulb only

NLMP993

Optional

Lamp original

L1560A

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n993>

- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/compaqmp1410-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.