

Digital Projection HIGHlite 8000dsx+



The HIGHlite 8000dsx+ DLP projector from Digital Projection has 8000 ANSI lumens, a contrast ratio of 2000:1, and SXGA+ 1400 x 1050 resolution. The built-in lens shift function provides freedom in projection adjustment. 8000 ANSI lumens ensure that an image width of 779 cm is possible. The projector can handle rooms with residual light with a smaller image width; we would recommend a maximum of 519 cm. If the image is still too small, the projector offers integrated edge blending software, which allows multiple projectors to project a large image together. Even 1080P video signals are no problem for the projector. The model was built by Digital Projection in 2004 and is no longer current.



3 x 0,95" DLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

8000

2000:1 full on/off

4,0000 min. Lumen

Vert.: +45% -10% Hori.: +17% -28% motorisch

SXGA+ 1400 x 1050

1.470.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

2000W Xenon Lamp

Article Nr.: 111-100

1000 h.

12,68% / 0,78 €

Powered

Powered

optional

optional

nein

DVI-D

5 x BNC RGBHV in

D-sub 15pin in

RS232C in und out

RJ45

PCMCIA Slot

Yes, is possible.

2600W

690 x 532 x 1010 mm (27,2"x20,9"x39,8") 370,75 L/dm³

52dB

84,00 kg / 185,19 lbs.


-

-

2667 Lux (bei 200 cm Screen)

2000:1 full on/off

1,336 min. Lumen

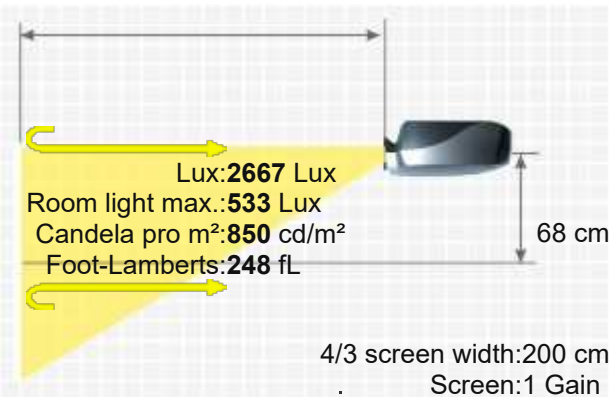

Frequenz H-sync: 15-105 kHz
V-sync: 24-110 Hz

Foot-Lamberts 248 fL / max. 779 cm screen width

850 cd/m²



- Full HD 1080P compatible
- Lens shift Funktion motorisch
- Freeze
- Gamma correction
- Edge Blending
- Password protection
- Control via web browser
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Overscan adjustable
- 3D reform
- Digital Zoom
- De-interlacer

Screen Mirroring -

Optional accessories

	Nackte Osram Lampe	NLMP20894	138,24 €
	Lampe Ruby	Ruby-LMP20894	163,86 €
	Lampe Original	111-100	779,55 €
	Kompatible Lampe	LMP-K20893	84,39 €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Digital Projection 130-491 (SL-18Z)	1.8-2.5:1	3.6-5 m	45-10%	17-28%	Powered
Digital Projection 103-493 (SL-45Z)	4.5-7.3:1	9-14.6 m	45-10%	17-28%	Powered
Digital Projection 103-492 (SL-25Z)	2.5-4.5:1	5-9 m	45-10%	17-28%	Powered
Digital Projection 103-490 (SL-14Z)	1.45-1.8:1	2.9-3.6 m	45-10%	17-28%	Powered
Fix Optional Lenses					
Digital Projection 103-489 (SL-07F)	0.73:1	1.5 m	0.0% Fix		No Zoom

Status Data 2004 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema
<https://www.projector-database.com/pro/digitalprojectionhightlite8000Dsplus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.