

Dukane ImagePro 8053



Brief Introduction

Beta 2.5

The Dukane ImagePro 8053 LCD projector has 2700 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. Due to the brightness of 2700 Ansi lumens, a picture width of 453 cm is possible. In room light, the picture should be max. 302 cm wide. The projector is no longer sold by the manufacturer.

Display Type

3 x 0,9" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

2700 / 2160 im Eco Mode 874 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off 400:1 full on/off

Black Level

6,7500 min. Lumen 2.202 min. Lumen

Offset

-

Resolution

SVGA 800 x 600
480.000 Pixel

Video Modes

NTSC, NTSC 4.43, PAL, MPAL,
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

250W UHB Lamp
Articel Nr.: 456-226

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-2,1

Throw Ratio

1,98-2,56:1

Audio

2 x 1W

Connections

(1) Component, RCA X 3
(1) Min DIN 4-pin, s-video
(1) RCA, composite video
(1) Audio, Stereo, RCA x 2
(2) Signal: D-sub, 15 pin
(2) Audio, Stereo, mini jack
Output, Audio (1) Stereo, mini jack
Outputs Monitor 15 pin, D-sub
Outputs,Control 15 pin, D-sub, RS232C, PS/2, ADB,
USB connector, Mouse control

Ceiling Mounting

Yes

Power

410W

Size WxHxD

-

Operating Noise

40 / 36 dB in Eco Mode

Weight


5,00 kg / 11,02 lbs.

Keystone

-

Illumination

-

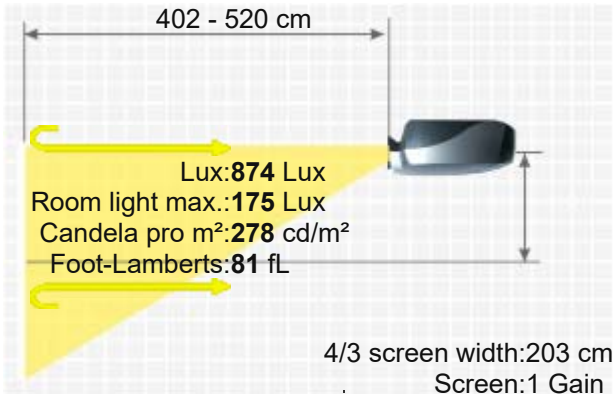

Frequenz	H-sync: 15-91 kHz V-sync: 50-120 Hz
Foot-Lamberts	81 fL / max. 453 cm screen width 278 cd/m²
Features	■ Freeze ■ Blank (Black screen button) ■ User logo ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ Remote control with laser pointer und mouse control
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8053-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.