




ImagePro 8053 Portable Powerful LCD Projector

- 2700 lumen brightness
- SVGA resolution
- Easy to transport, only 9.9 lbs.
- Full set of features, 5 inputs
- Monitor loopthrough
- Audio output switches with source

Exclusive five year warranty
the best warranty in the industry

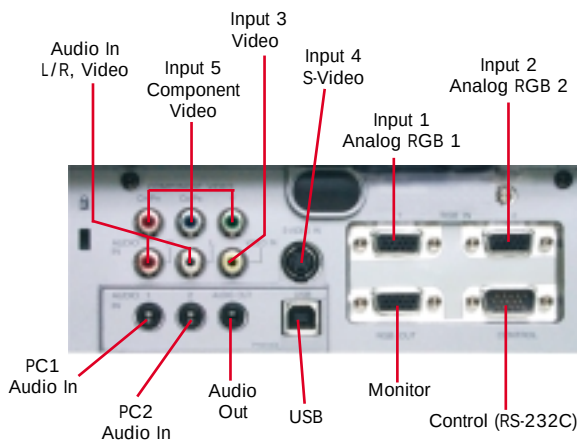

8053

DUKANE

ImagePro 8053

Premium-quality LCD projector

A new way of thinking about projection

The Dukane ImagePro 8053 is a projector that can be easily moved around while still providing higher image brightness and features that make presentations easy. It is simple to use, transport, and can be set up in a minute.

This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required. Use it as a portable or mount it on the ceiling.



Key features:

- SVGA (800 x 600) resolution
- 2700 ANSI Lumens of brightness
- Vibrant rich colored images
- Easy carry 9.9 lbs.
- Flexibility with 2 computer and 3 video inputs
- Full function remote with mouse/cursor control and laser pointer
- Audio output switches with selection of video or computer source
- "Custom Image" for your startup and blank screens
- "Silent Running" so you hear only your message
- Vertical and horizontal keystone correction
- Five Year Warranty and Peace of Mind Service
- Picture in Picture and digital zoom
- Component video, HDTV ready

Image Size 4:3		Throw Distance	
Diagonal Inches	Width Inches	Min, Feet	Max, Feet
40	32	5.2	6.8
60	48	7.8	10.2
80	64	10.6	13.7
100	80	13.3	17.1
120	96	16	20.5
150	120	20.1	25.7
200	160	26.9	34.2

Specifications

LCD Type	8053 0.9" polysilicon active-matrix TFT x3
Brightness	2700 ANSI lumens (2160 lumens in Whisper Mode)
Resolution	800 x 600 pixels (H X V)
Contrast	400:1
Scanning Frequency	fh 15-91 kHz, fv 50-120 Hz
Lens	Manual zoom (f1.7 - 2.1), 1.3X
Lens Throw Ratio	1.98 - 2.56:1 throw distance to image width
Keystone Correction	Digital, vert. & horiz. (15/5deg)
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA SXGA/Compressed PC and Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, M-PAL, N-PAL, PAL60, SECAM
Component Video Image Control	480i, 575i, 480p, 1080i, 720p Freeze function, electronic magnification, pan and Picture in Picture
Mouse Control	Using USB or PS/2
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	250W UHb
Lamp Life	2000 hours (typical)
Audio	2 speaker x 1 watt
Throw Distance	62" to 411"
Screen Size	40" to 200" diagonal
Inputs, Video	(1) Component, RCA X 3 (1) Min DIN 4-pin, s-video (1) RCA, composite video (1) Audio, Stereo, RCA x 2 (2) Signal: D-sub, 15 pin (2) Audio, Stereo, mini jack
Inputs, Computer	(1) Stereo, mini jack (1) 15 pin, D-sub
Output, Audio	15 pin, D-sub, RS-232, PS/2, ADB, USB connector, Mouse control
Outputs Monitor	Kensington lock slot
Outputs, Control	0°- 35°C (32°- 95°F)
Security	40dB, ultra quiet 36dB in Whisper Mode
Operating Temperature	AC 100-120V, AC220-240V
Fan Level	50/60 Hz, 410 watt
Power	14.2" x 4.2" x 10.1"
Size (WxHxD)	9.9 lbs.
Weight	20 lbs.
Shipping Weight	14.5" x 12.5" x 18"
Carton Size	Remote control with laser pointer, batteries, power cord, Video/Audio cable, PS/2 mouse cable, RGB cable, soft case, and operator's manual.
Accessories Included	UL/CUL, FCC Class B, CE, TLIV
Safety	Lamp 456-226; rolling briefcase; 185-406
Optional Accessories	

Five (5) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).

Includes Dukane's FREE 24 month Peace-of-Mind Loaner Program.

5YR

DUKANE



Audiovisual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com / av

Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com