

Dukane ImagePro 8066

DUKANE IMAGEPRO 8066



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Power

A brief introduction to the Dukane ImagePro 8066. The standard portable LCD projector has an SVGA 800 x 600 resolution and a contrast of 400:1. The brightness of 2000 Ansi lumens enables an image width of 389 cm. In room light, the picture should be max. 259 cm wide. This model is no longer offered by Dukane.



3 x 0,6" LCD TFT Panel mit MLA

SVGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

2000 / 1600 im Eco Mode

400:1 full on/off

5,0000 min. Lumen

Screen

667 Lux (bei 200 cm Screen)

400:1 full on/off

1,68 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

165W UHB Lamp

Articel Nr.: DT00701

2000 h. 3000 h. in Eco Mode

-

Manual

Manual 1,2

F=1,6-1,9 f=18,6-22,3 mm

1,53-1,83:1

1 x 1W

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in


Mini jack in

RS232C Din 9pin in



Yes

240W

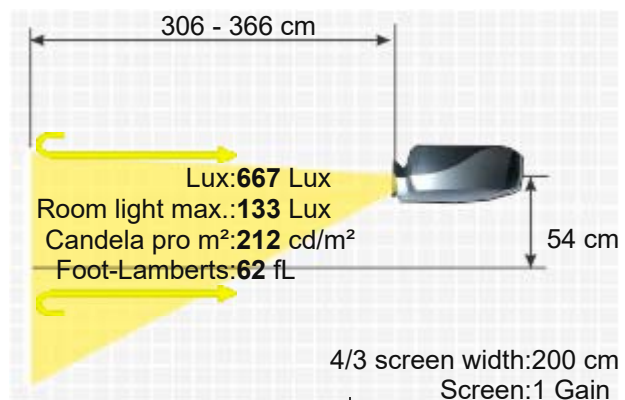

Size WxHxD 285 x 73 x 202 mm (11,2"x2,9"x8") 4,2 L/dm³
Operating Noise 38 / 32 dB in Eco Mode


Weight 2,30 kg / 5,07 lbs.
Keystone Vert.: +/-15°
Illumination -

Frequenz H-sync: 15-91 kHz
V-sync: 50-120 Hz

Foot-Lamberts 62 fL / max. 389 cm screen width
212 cd/m²

- Features
- Freeze
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Password protection
 - Digital zoom x 1.2

Status 2006 Discontinued (EOL) // Last update of the data: 2023-08-04

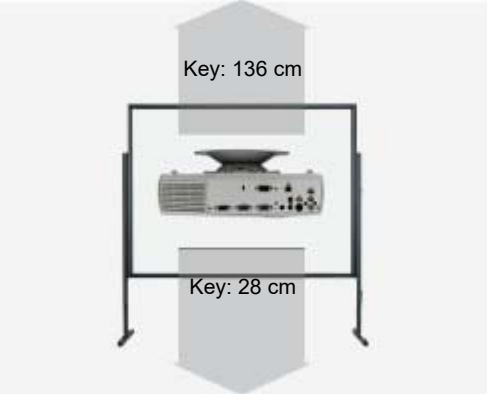

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8066-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.