




ImagePro 8760 Portable DLP Projector

- 2000 lumen brightness
- XGA resolution
- 2000 to 1 contrast ratio
- DLP™ technology by Texas Instruments
- Quiet operation
- PC card slot
- Wired and wireless LAN capability
- Sealed optics
- Operate up to 14 hours a day
7 days a week
- Keystone correction
- Password protection

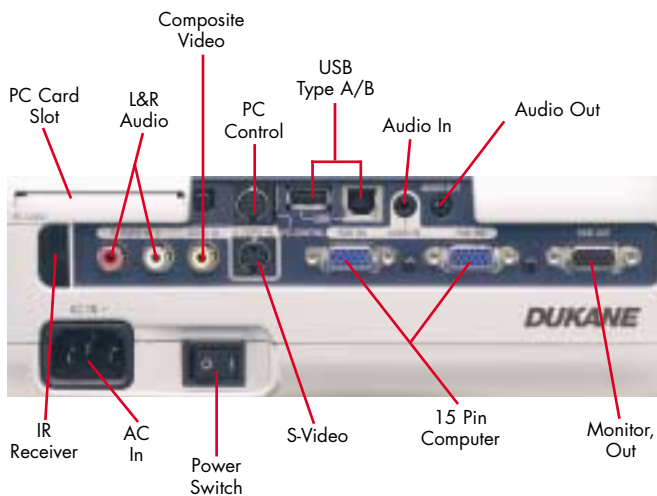

8760 DUKANE

ImagePro 8760

Portable DLP projector

The Dukane ImagePro 8760™ is a versatile solution for the most demanding presentation requirements. Providing realistic colors, sharp contrast, and super bright images, the 8760 is sure to impress.

Bright enough for installation and light enough for travel, the easy-to-use ImagePro 8760 may be the only projector you'll ever need. It's specifically designed for high resolution computers and for displaying detailed information like financial data and graphics. It's ideal for small- to large-sized business, school or government that needs a projector for meeting or conference rooms as well as portable display. It offers maximum brightness for large rooms as well or rooms with significant ambient light. Best in it's class functionality ensuring that every presentation will be a winner.



Key features:

- 2000 lumen brightness
- XGA resolution
- 2000 to 1 contrast ratio
- DLP™ technology by Texas Instruments
- Quiet operation only 32dB, 29dB in whisper mode
- PC card slot
- 2000 hour lamp life, 3000 hour in whisper mode
- Wide angle lens
- Remote control with laser pointer
- Keystone correction
- Wired and wireless LAN capability
- Sealed optics
- Password protection
- Operate up to 14 hours per day 7 days a week
- Three year warranty and Two year Peace-of-Mind service



DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485
630-584-5156
avsales@dukcorp.com
www.dukcorp/av.com

toll-free
fax
e-mail



ImagePro is a registered trademark of Dukane Corporation
#11636-B-05

Specifications 8760

Image Element	0.69" 12 degree DDR DMD DLP by Texas Instruments, XGA
Brightness	2000 ANSI lumens (1600 in whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	2000:1
Scanning Frequency	fh 15-100 kHz, fv 50-120 Hz
Lens	Manual zoom and focus (f22.4-27.0), 1.2x zoom
Lens Throw Ratio	1.55 -1.86:1 throw distance to image width
Keystone Correction	Digital, vertical +/-40 deg, horizontal +/- 34 deg
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA/UXGA Compressed Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 1080i/50 Hz, 720p, 480i/p, PAL progressive/50
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	220W NSH
Lamp Life	2000 hours, 3000 in whisper mode
Audio	1 speakers, 1 watt
Throw Distance	35.7" to 749.9"
Screen Size, diagonal	30" to 500"
Inputs, Video	(1) RCA, composite video, with L/R RCA audio shared (1) S-video, Min DIN 4-pin, with RCA audio shared
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin (1) Audio, Stereo mini jack (1) PC Card slot: PCMCIA type II
Outputs Monitor	15 pin, D-sub
Outputs, Control	PC control DIN 8 pin Audio out, Stereo mini jack USB Type A & B
Security	Kensington slot and password protection
Fan Level	32 dB, 29 dB in whisper mode
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC200-240V 50/60 Hz, 280 watt
Size (WxHxD)	10.2" x 4.7" x 11.8"
Weight	7.2 lbs.
Carton Size	14.2" x 14" x 17.3"
Shipping Weight	14.8 lbs.
Accessories Included	Remote control, RGB cable, power cord, USB cable, operators manual, CDROM and soft carry case.
Safety	UL/CUL, FCC Class B
Optional Accessories	Lamp 456-8760 Ceiling mount, universal; PJF-UNV-S

Three (3) year limited warranty on parts and labor in North America,
lamp excluded (for other locations, local warranties apply). Includes
Dukane's FREE 2 year Peace-of-Mind Loaner Program.

3YR