

Dukane ImagePro 8762



DUKANE IMAGEPRO 8762



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset



1 x 0,69" 12 Grad DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

2600 / 2200 im Eco Mode
1600:1 full on/off
1,6250 min. Lumen

Screen

867 Lux (bei 200 cm Screen)
1600:1 full on/off
0,543 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

SXGA+ 1400 x 1050 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W Lamp

Articel Nr.: 456-8762

Light Life

2000 h. 2500 h. in Eco Mode

Operating Costs

-

Focus

Automatic

Zoom

Manual 1,2

Objective

F=2,4-2,6 f=25,7-30,8 mm

Throw Ratio

1,86-2,2:1

Audio

1W Mono

Connections

D-sub 15pin
Cinch Video in
S-Video in
Mini Jack
RS232C Din 8pin



Ceiling Mounting

Yes

Power


260W

Size WxHxD

260 x 88,9 x 208,5 mm (10,2"x3,5"x8,2") 4,76 L/dm³

Operating Noise

37 / 33 dB in Eco Mode

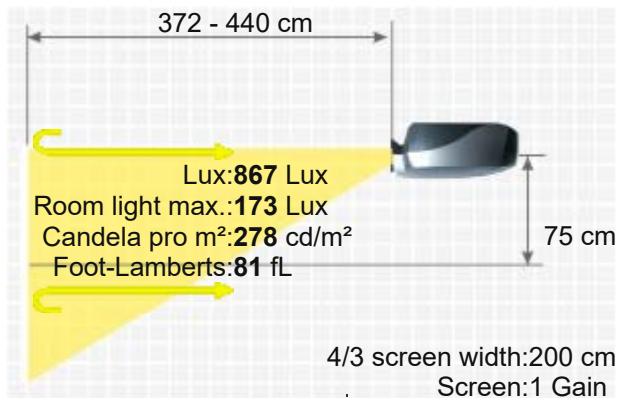

Weight

2,00 kg / 4,41 lbs.

Keystone

Vert.: +/-16° automatisch

Illumination

-

Frequenz	H-sync: 15-100 kHz V-sync: 50-85 Hz	
Foot-Lamberts	81 fL / max. 444 cm screen width 278 cd/m²	
Features	■ Freeze ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot ■ Password protection ■ Digital Zoom ■ De-interlacer with 3:2 2:2 pull down	
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04	



More Details



<https://www.projector-database.com/pro/dukaneimagepro8762-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.