

Dukane ImagePro 8769



DUKANE IMAGEPRO 8769



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset



3 x 0,7" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

2500 / 1900 im Eco Mode
400:1 full on/off
6,2500 min. Lumen

Screen

833 Lux (bei 200 cm Screen)
400:1 full on/off
2,098 min. Lumen

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W UHP Lamp

Articel Nr.: 456-8767A

2000 h. 3000 h. in Eco Mode

-

Manual

Manual 1,2

F=1,7-2,0 f=21,6-25,9 mm

1,5-1,8:1

1 x 1W Mono

D-sub 15pin in und out

Cinch Video in

S-Video in

Mini Jack

RS232C Din 8pin





Yes

250W / 8W standby

294 x 93 x 260 mm (11,6"x3,7"x10,2") 7,11 L/dm³

35 / 30 dB in Eco Mode

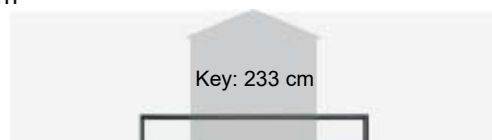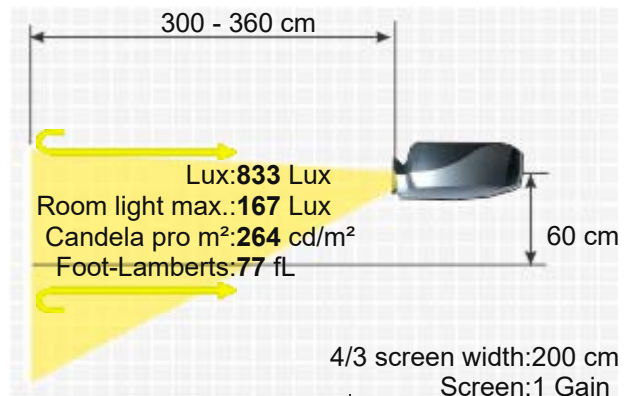

Weight

Keystone

Illumination

2,90 kg / 6,39 lbs.

Vert.: +/-30° automatisch

-

Frequenz	H-sync: 15-100 kHz V-sync: 50-120 Hz	
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²	
Features	■ Freeze ■ Blackboard Modus ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot ■ Gamma correction ■ digital zoom ■ Advanced AccuBlend ■ off timer function ■ security function	
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04	



More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8769-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.