

Dukane ImagePro 8783



DUKANE IMAGEPRO 8783



The Dukane ImagePro 8783 standard portable LCD projector has 2000 Ansi lumens, a contrast of 500:1 and a WXGA 1280 x 800 resolution. 454 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 303 cm. On the market since 2008, the model is no longer offered by the manufacturer Dukane.

3 x 0,59" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

2000 / 1600 im Eco Mode
500:1 full on/off
4,0000 min. Lumen
800 Lux (bei 200 cm Screen)
500:1 full on/off
1,608 min. Lumen

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

190W UHB Lamp

Articel Nr.: 456-8783

2000 h. 3000 h. in Eco Mode

-

Manual

Manual 1,2

F=1,7-1,9

1,5-1,8:1

1 x 1W

HDMI in

2 x D-sub 15 pin in

S-Video in

Cinch Video in

Mini Jack Audio in und out

USB Typ B in

Yes

310W

274 x 65 x 205 mm (10,8"x2,6"x8,1") 3,65 L/dm³

40 / 33 dB in Eco Mode

1,77 kg / 3,9 lbs.


Vert.: +/-30°

-


H-sync: 15-106 kHz

V-sync: 50-120 Hz

74 fL / max. 454 cm screen width

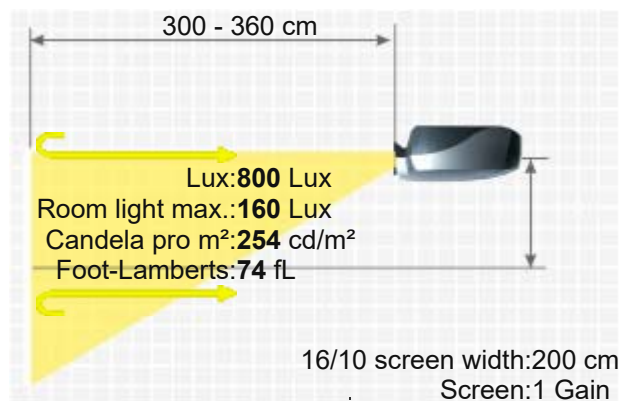

254 cd/m²



- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with mouse control
- Wi-Fi network compatible.
- Lan network compatible.
- De-interlacer with 3:2 pull down..

Features

Status
Data
2008 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8783-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.