

Dukane ImagePro 8792H



DUKANE IMAGEPRO 8792H



The standard portable ImagePro 8792H LCD projector from Dukane has 3200 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. An image width of up to 493 cm is possible as the projector has 3200 Ansi lumens. However, if room light is available, the image should be a maximum of 329 cm wide. The model is also Full HD 1080P compatible. The model was built by Dukane in 2010 and is no longer current.

 3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	3200 / 2500 im Eco Mode	Screen	1067 Lux (bei 200 cm Screen)
Contrast	500:1 full on/off		500:1 full on/off
Black Level Offset	6,4000 min. Lumen		2,147 min. Lumen

XGA 1024 x 768
786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

200W UHP Lamp

Articel Nr.: DT01141

3000 h. 4000 h. in eco Mode

-

Manual

Manual 1,15

-

1,3-1,5:1

1W Mono

HDMI in
D-Sub 15 pin in und out
S-Video in
Cinch Video in
Mini Jack Audio in und out
RS232C




Yes

270W

306 x 77 x 221 mm (12"x3"x8,7") 5,21 L/dm³

37 / 30 dB in Eco Mode

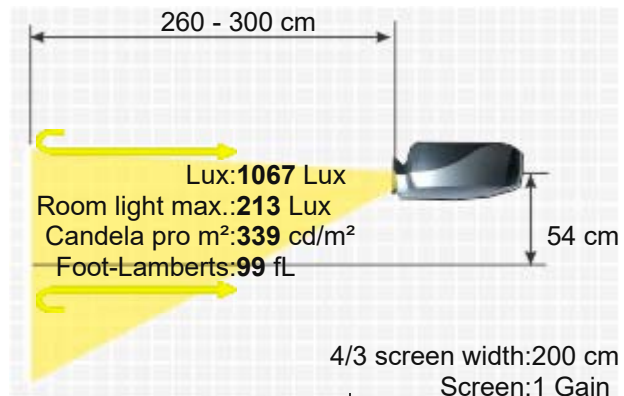

Weight 2,20 kg / 4,85 lbs.
Keystone Vert.: +/-30° automatisch
Illumination -
Frequenz -

Foot-Lamberts 99 fL / max. 493 cm screen width
339 cd/m²

- Full HD 1080P compatible
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- Eco Mode

Features ■ Automatic and manual vertical keystone correction
■ Kensington Slot
■ Gamma correction
■ Password protection
■ Remote control with laser pointer
■ Overscan adjustable

Status Data 2010 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8792h-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.