

Dukane ImagePro 8913

DUKANE IMAGEPRO 8913



Brief Introduction

Beta 2.5

A brief introduction to the Dukane ImagePro 8913. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 400:1. The projector can illuminate a picture width of up to 477 cm thanks to its 3000 Ansi lumens. In room light, however, the image width should ideally be less than 318 cm. The projector was launched in 2007 and is no longer sold by the manufacturer.

Display Type

 3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

3000 / 2500 im Eco Mode

1000 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

7,5000 min. Lumen

2,519 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

220W UHB Lamp

Articel Nr.: 456-8755G

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,6-1,8 f=18,9-22,6 mm

Throw Ratio


1,46-1,75:1

Audio

1 x 6,0W

Connections

2 x D-sub 15 pin in 1 x out
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
USB Typ B
Mini jack Audio in und out
RS232C

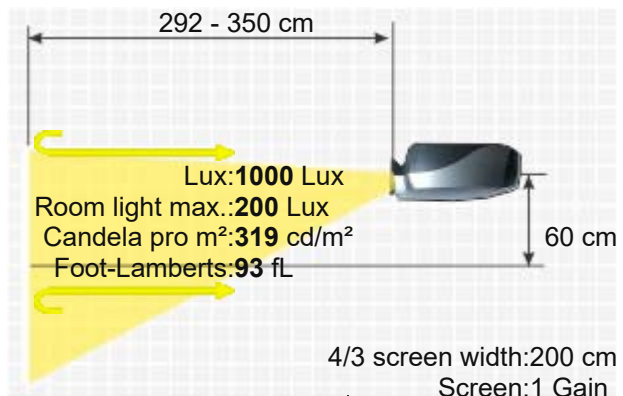



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
330W
340 x 100 x 270 mm (13,4"x3,9"x10,6") 9,18 L/dm³
39 / 34 dB in Eco Mode

Weight
Keystone
Illumination

3,50 kg / 7,72 lbs.
Vert.: +/-30° automatisch
-

Frequenz

H-sync: 56-120 kHz
V-sync: 31,5-106 Hz

Foot-Lamberts


93 fL / max. 477 cm screen width
319 cd/m²
■ Direkt Power Off
■ Freeze
■ Blank (Black screen button)
■ Blackboard Modus
■ User logo
■ Eco Mode

Features

■ Automatic and manual vertical keystone correction
■ Kensington Slot
■ Gamma correction
■ Password protection
■ Remote control with mouse control
■ Overscan adjustable
■ De-interlacer with 3:2 pull down.

Status

2007 Discontinued (EOL) // Last update of the data: 2023-08-04

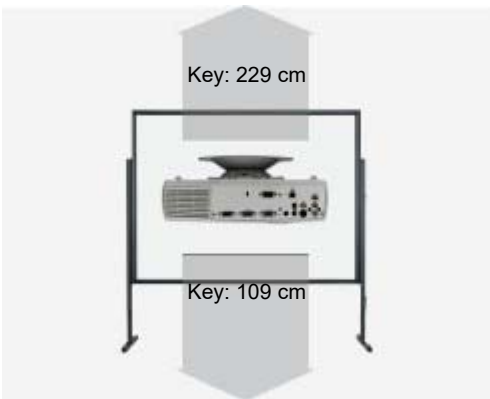

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8913-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.