

# Eiki EK-501W

EIKI EK-501W



A brief introduction to the EK-501W: The Eiki LCD projector offers 6000 Ansi lumens, a contrast of 2500:1 and a WXGA 1280 x 800 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. 787 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 525 cm here. Even 1080P video signals are no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection. It was launched on the market in 2016 and is no longer offered by the manufacturer Eiki.



3 x 0,75" LCD TFT Panel  
WXGA 16/10 Liquid Crystal Display

Projector

6000

2500:1 full on/off

2,4000 min. Lumen

Vert.: +/-70% Hori.: +/-30%

WXGA 1280 x 800

1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p 80p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

350W Lamp

Articel Nr.: 23040051

3000 h. 4000 h. in Eco Mode

-

-

Powered

Powered 1,8

F=1,8-2,58 f=23,95-43,18 mm

1,47-2,65:1

10W


2 x HDMI in  
DVI-D in  
D-Sub 15 pin in und out  
5 x BNC RGBHV in  
S-Video in  
1 x BNC Video in  
Mini Jack Audio in und out

Screen

2400 Lux (bei 200 cm Screen)

2500:1 full on/off

0,961 min. Lumen

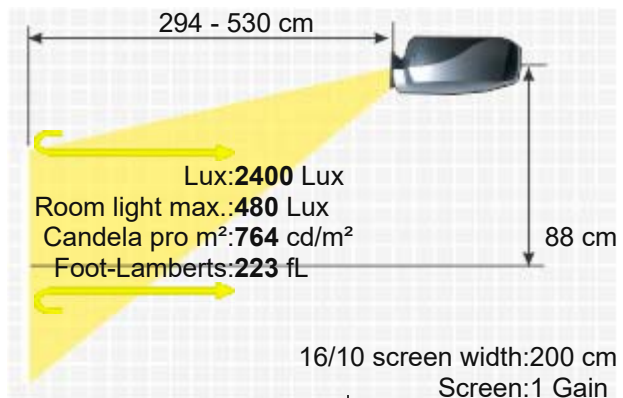

Brief Introduction  
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections


Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

RJ45 in  
Yes  
480 / 360W in Eco Mode  
503 x 179 x 481 mm (19,8"x7"x18,9") 43,31 L/dm³  
36 / 32 dB in Eco Mode

Weight  
Keystone  
Illumination  
Frequenz  
Foot-Lamberts

10,50 kg / 23,15 lbs.  
Vert.: +/-15°  
80%  
H-sync: 15-100 kHz  
V-sync: 48-85 Hz  
Range max.: 150 MHz  
223 fL / max. 787 cm screen width  
764 cd/m²

- Features
- Full HD 1080P compatible
  - Lens shift Funktion
  - Blackboard Modus
  - Eco Mode
  - Dynamic iris
  - 360° installable
  - Lan network compatible.
  - Internal test image signals for optimal image adjustment.
  - E-mail alert function for direct notification of
  - faults in projector operation.

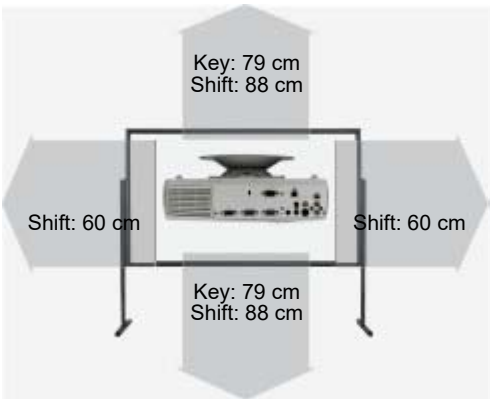

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-E23020	4.37-7.42:1	8.7-14.8 m	+/-70%	+/-30%	Powered
AH-E23010	2.83-4.58:1	5.7-9.2 m	+/-70%	+/-30%	Powered
AH-E22020	1.2-1.55:1	2.4-3.1 m	+/-70%	+/-30%	Powered
AH-E21010	1.49-2.68:1	3-5.4 m	+/-70%	+/-30%	Powered
Fix Optional Lenses					
AH-E22010	0.77:1	1.5 m	0.00% Fix		No Zoom

Status

2016 Discontinued (EOL) // Last update of the data: 2023-08-04  
Created: 2016-02-03 17:06:50



More Details



# HCinema

<https://www.projector-database.com/pro/eikiek501w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.